

Survey Notes

Mining claims in the east half of this section were created and surveyed prior to the original government survey of the section. The mining claims would, therefore, have senior rights. An extensive search for these mining claim corners was conducted, with none of the corners being found. I, therefore, based the location of these mining claims on the sectional breakdown, as it appears that the mineral surveys attempted to use the same dimensions as those of aliquot parts of the section. Also, the original government notes call all the mining claim corners at 1/16 corners.


The location of the U.S. Forest Service parcel in the NE 1/4 of this section was determined by proportioning distances called in the mineral surveys along the section line and 1/16 lines.

Private

State Parks

USA

USA

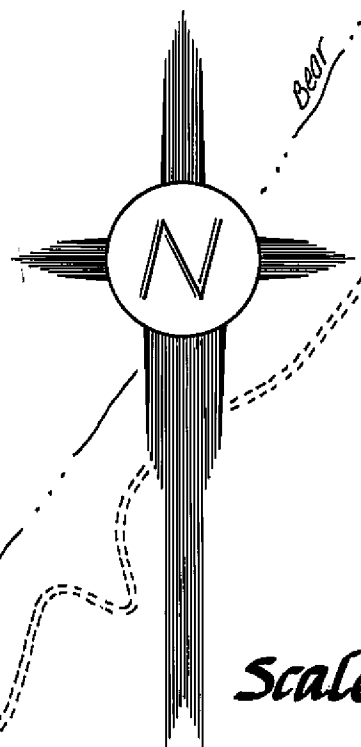

Scale - 1" = 500'

Legend

- L5 4570 2-in. aluminum capped aluminum pipe (ACAP) set in this survey.
- Original government corner re-monumented with L5 4570 2-in. ACAP in this survey
- ⊙ Original government corner re-monumented by others as noted
- Property line marked and posted to USFS standards
- [J' Original government information
- [J² Information from Mineral Survey No. 657
- [J³ Information from Mineral Survey No. 896
- () Record information as noted
- ==== Dirt road

- ⊙ Quarter Corner between Sections 11-14: Found 3/4-in. iron pipe by L5 3297 per 4 R/S 103 in heavy brush from which bears the original 34-in. p.pine with closed face N 25° 11' W, 132.9 ft (Record N 25° W, 200 lks.). Placed ACAP at this position, and scribed and tagged: 1) 10-in. w. fir N 91° 40' E, 20.5 ft.
- ⊙ Section Corner to Sections 11-12-13-14: Found 3/4-in. iron pipe by L5 3297 and granite stone, per 4 R/S 2 on south edge of flat some 100 ft. west of the end of a dirt road. Set ACAP in this position, and scribed and tagged: 1) 18-in. p.pine S 82° 44' W, 37.0 ft.; 2) 19-in. p.pine N 39° 14' W, 16.0 ft.; 3) 22-in. D. fir S 11° 17' E, 49.8 ft.; 4) 20-in. p.pine N 64° 09' E, 35.6 ft.
- ⊙ 1/16 Corner between Sections 11-14: Set ACAP on northerly edge of a large brush field, and in a heavy stand of small timber. Scribed and tagged: 1) 10-in. w. fir N 70° W, 9.8 ft.; 2) 13-in. w. fir N 74° E, 7.0 ft.

Corner Notes

- ① Section Corner to Sections 2-3-10-11: Found and accepted 1-in. iron pipe with 1/2-in. cap properly stamped by L5 3848 per 4 R/S 82; see also 6 R/S 103. Found the following L5 3848 BT's: 1) 16-in. p.pine N 87° 48' W, 18.6 ft.; 2) 23-in. sugar pine N 6° 54' E, 45.6 ft.; 3) 13-in. w. fir S 49° 32' E, 30.4 ft.; 4) 15-in. w. fir S 75° 31' W, 6.4 ft. Placed ACAP in old pipe position.
- ② Quarter Corner between Sections 2-11: Found and accepted 1-in. iron pipe with 1/2-in. cap properly stamped by L5 3848 per 4 R/S 82; see also 6 R/S 103. Found original 50-in. p.pine BT S 14° 40' E, 21.3 ft. (record S 15° E, 19.8 ft.) and the following BT's by L5 3848: 1) 20-in. w. fir S 76° 34' W, 16.9 ft.; 2) 18-in. w. fir N 41° 07' E, 13.4 ft. Placed ACAP in old pipe position.
- ③ Property Corner between Sections 2-11: Set ACAP as witness corner N 29° 32' E, 1.1 ft. from true corner position, as corner falls in a large rock. Scribed and tagged: 1) 18-in. sugar pine S 19° E, 18.4 ft. from true corner position.
- ④ Property Corner between Sections 2-11: Set ACAP on gentle east slope in a heavy stand of small fir and pine. Scribed and tagged: 1) 8-in. incense cedar N 36° W, 7.5 ft.; 2) 13-in. D. fir N 66° E, 4.2 ft.
- ⑤ Section Corner to Sections 1-2-11-12: Found and accepted 3/4-in. iron pipe with L5 3297 tag per 4 R/S 2 in rock mound, from which bears a 35-in. incense cedar original BT N 80° 25' W, 29.0 ft. (Record N 85° W, 32 lks.) on an open, timbered flat. Placed ACAP at old pipe position, and scribed and tagged: 1) 15-in. p.pine N 36° 32' W, 40.0 ft.; 2) 18-in. incense cedar S 77° 29' E, 41.4 ft.
- ⑥ Property Corner, Section 11: Set ACAP as witness corner N 1° 45' E, 12.6 ft. from true corner position, as corner falls in a large rock. Scribed and tagged: 1) 15-in. D. fir N 80° 04' E, 33.4 ft. Corner falls on a brushy south slope with large boulders.
- ⑦ Property Corner, Section 11: Set ACAP as witness corner N 0° 17' W, 11.7 ft. from true corner position, as corner falls in an area of underground rocks. Scribed and tagged: 1) 32-in. w. fir S 88° 55' W, 11.1 ft. Corner falls in an open-timbered flat area.
- ⑧ Quarter Corner between Sections 10-11: Found and accepted 1-in. iron pipe with 1/2-in. cap properly stamped by L5 3848 per 4 R/S 82; also see 6 R/S 103. Found original w. fir snag BT (now 18-in.) with scribing S 65° 28' W, 19.7 ft. (Record S 65° W, 30 lks.) and the following L5 3848 bearing trees: 1) 30-in. w. fir S 4° 26' W, 23.4 ft.; 2) 15-in. incense cedar N 78° 55' E, 31.1 ft.
- ⑨ 1/16 Corner, Section 11: Set ACAP on the west edge of a dirt road. Scribed and tagged: 1) 15-in. p.pine S 59° 04' W, 37.4 ft.; 2) 8-in. w. fir S 30° 32' E, 36.0 ft.
- ⑩ 1/16 Corner, Section 11: Set ACAP on steep north slope 100 ft. south of a flat. Scribed and tagged: 1) 23-in. w. fir S 66° 49' W, 76.2 ft.; 2) 27-in. sugar pine S 13° 22' W, 13.1 ft.
- ⑪ Quarter Corner between Sections 11-12: Found no evidence of original corner search of area. Set ACAP at single proportion position at a 3/4-in. iron pipe by L5 3297 per 4 R/S 2. Corner falls on west side of a dirt road. Scribed and tagged: 1) 20-in. p.pine N 57° 12' E, 32.0 ft.; 2) 25-in. sugar pine S 35° E, 2.0 ft.
- ⑫ 1/16 Corner, Section 11: Set ACAP on a gentle east slope in open-timbered area, 70 ft. east of a dirt road. Scribed and tagged: 1) 14-in. w. fir N 45° E, 2.3 ft.; 2) 13-in. sugar pine N 47° W, 6.2 ft.
- ⑬ 1/16 Corner between Sections 11-12: Set ACAP on flat area N 45° W, 100 ft. from end of dirt road. Scribed and tagged: 1) 19-in. w. fir S 77° 18' E, 28.9 ft.; 2) 28-in. sugar pine S 25° W, 39.2 ft.
- ⑭ Section Corner to Sections 10-11-14-15: Set ACAP in old rock mound with the following original BT's: 1) 42-in. fir snag with bark scribing N 24° 37' E, 12.2 ft. (Record N 25° E, 16 lks.); 2) 46-in. fir snag S 59° 25' W, 40.5 ft. (Record S 65° W, 56 lks.); 3) large fir stump hole S 87° 12' E, 19.3 ft. (Record S 15° E, 30 lks.). Scribed and tagged: 1) 7-in. red fir N 38° 41' W, 20.1 ft.; 2) 19-in. red fir S 73° 28' W, 17.0 ft. Corner falls 60 ft. south of an easterly-flowing creek.

Recorder's Statement

Filed this 10 day of March, 1989, at 1:07 PM in Book 8 of Record of Surveys, at Page 61, Plumas County Records, at the request of the County Engineer.

Fee: \$5.00

Ila Diggs, County Recorder
County of Plumas
State of California

File No. 1430

By: Rich Carramada
Deputy

County Surveyor's Statement

This map has been examined in accordance with Section 8766 of the Land Surveyor's Act this 10 day of March, 1989.

Laurence J. Brock
Lawrence J. Brock, County Surveyor
County of Plumas
State of California


License No.: RCE 15528

License Expires: 3/31/89

Surveyor's Statement

This map correctly represents a survey made by me, or under my direction, in conformance with the requirements of the Land Surveyor's Act of the request of the U.S. Department of Agriculture, Forest Service, November 1988.

Ronald D. Hunt
Ronald D. Hunt
California Licensed Land Surveyor
No. 4570
License Expires: September 30, 1990

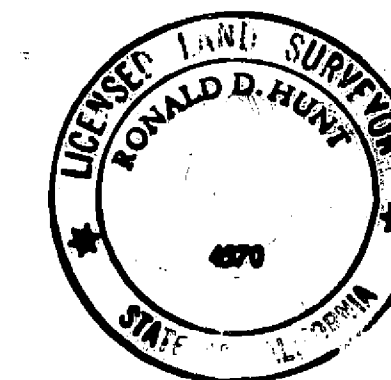

Basis of Bearing

True North is based on solar observation and determined by the hour angle method at a station S 15° 16' W, 119.4 ft. from the C14, Sec. 11.

Record of Survey
for
U.S. Department of Agriculture
Forest Service
East Side Cadastral Survey
Section 11, T22N-R11E, M.D.M.
in the Unincorporated Area of Plumas County
R.D. Hunt Surveying & Forestry
Arcata, California
November 1988
Scale - 1" = 500'
Sheet 1 of 1