See Sheet 3

Section Corner see sheet 1

(S87°16'W 38.14 chs. G.L.O.)

N85°58'14"E 1263.79' / 764.37' 378.42'

S85°58'14"W 1263.79'

Set Bearing Tree Tags on 6" Cottonwood N87°05'W, 7.0' and also Found 1" I.P. tagged RCE 7567 per 2 RS 112 S13°39'38"W, 27.76' from 1/16 Corner

121.00' (EAST 121.00' R5)

(S09°07'34"E 646.61' / S08°08'E 646.50' R1)

Basis of Bearings

1345.90'

Found 5/8" rebar with Plastic Cap stamped CONTROL PNF per 9 RS 80

Lot 1

Lot 2

S00°58'40"W 1342.92'

S00°00'00"E 1219.00' (SOUTH 1219.00 R5 & R6)

(EAST 100.00' R5 & R6) EAST 100.00'

(S16°30'00"W R5 & R6) S16°30'00"W 122.37'

N85°55'17"E 209.39'

N85°55'17"E 1074.27' / 1283.66'

N85°55'17"E 1283.66'

See Detail "A"

(WEST 40.00 chs. G.L.O.)
(S88°33'09"W 2651.94' R3)
(S88°48'25"W 2651.43' R2)

S88°39'42"W 2652.16'

1/4 Corner
Found 1/2" rebar with Plastic Cap RCE 22836 per 7 RS 56
Bearing Trees
35" Pine N79°38'W 270.9' (K-tag S79°49'E, 271.30') (26" Pine N10°11'W, 271.30' R3)
30" Fir N46°00'E, 246.3' (K-tag S45°53'W, 246.00') (22" Fir N45°53'E, 246.79' R3)

Section Corner
Found 2" Brass Cap stamped as shown
LS 3185
T 23 N R 11 E

S10	S11
S15	S14

1973
per 4 RS 32
no accessories

1340.23' 2680.46'

S00°08'08"W (S00°16'05"W 2680.39' R2) (SOUTH 40.00 chs. G.L.O.)

5383.59' 318.57' 30.02'

L10 L9 L8 L7 L6 L5 L4 L3 L2 L1

30.02' 324.36'

Lot 4

Lot 3

1342.92'

N00°08'08"E 1340.23'

1/4 Corner set from Bearing Trees per 4 RS 32
24" Pine S11°26'E, 96.0' (S11°50'E, 96.0' R2 & BT tag)
19" Pine Stump S89°13'W, 105.8' (N89°15'W, 105.8' R2 & BT tag)
Telegraph pole N51°39'E, 35.5' (K-tag S50°W, 36.2')

Set Bearing Tree Tags on 13" Fir S45°17'W, 16.6' 7 " Fir N77°27E, 33.8'

Center of Section set per G.L.O. Notes

S88°39'42"W 2652.16' 1326.08'

S85°52'25"W 1303.53'

Section lines per 4 RS 32 see for dimensions

Found 2" Brass Cap stamped for center of Section per (R2) S51°54'51"E, 98.69' from set center

Set PK & Tag LS 2843 in stone

Set Bearing Tree Tags on 10" Cedar S14°28'W, 8.8' 7 " Cedar N29°24W, 5.8'

1/4 Corner See Sheet 1

See Sheet 1

(NORTH 80.00 chs. G.L.O.) (N01°58'57"E 5383.73' R2)

672.95' 1345.90' (N01°48'59"E)

Lot 5

Lot 6

Lot 7

Lot 8

1355.23' 2710.45'

S03°05'54"E 1367.05'

S02°32'39"E 1377.96'

1389.00' 2778.00' (N01°52'55"W 2777.51' R2) (N02°09'W 41.45 chs. G.L.O.)

Found 2" Aluminum Cap stamped "SE 1/16 S15 1987 LS 5317" per 7 RS 147 bearing S53°42'19"E, 23.54' from set corner.

S86°27'59"W 2722.02' / 1361.01'

S89°09'09"W 1313.14'

S89°09'09"W 1313.14'

2691.79' 1345.89'

Lot 12

Lot 11

Lot 10

Lot 9

N00°39'37"W 1355.22'

S02°32'39"E 688.98'

694.50' N01°59'54"W

1/4 Corner
Found 2" Brass Cap stamped as shown
LS 3185

S15
1/4 S22

1973
per 4 RS 32

S89°24'06"W 1306.70'

S03°05'54"E 1367.05'

S02°32'39"E 688.98'

694.50'

Bearing Trees
28" Cedar S28°38'E, 58.0'
(24" Cedar S28°30'E, 58.0' R2)
Stump N56°37'W, 25.0'
(Stump N56°30', 25.0' R2)

Section Corner see sheet 1

1418.63' 2837.26'

N87°00'40"E (N87°08'09"E 2840.07' R2) (N89°50'W 40.11 chs. G.L.O.)

1300.29' 1300.29'

N89°39'12"E 2600.58' (N89°46'01"E 2601.58' R2) (N89°50'W 40.11 chs. G.L.O.)

Section Corner
Found 2" Brass Cap stamped as shown
LS 3185
T 23 N R 11 E

S15	S14
S22	S23

1973
per 4 RS 32

Bearing Trees
21" Fir, blazed, S44°06'E, 38.5' (18" Pine S43°30'E, 39.0' R2)
11" Black Oak, blazed, S79°48'W, 71.9' (9" Black Oak S80°W, 72.5' R2)
16" Fir, blazed, N81°52'W, 88.1' (S81°45'E, 87.5' BT tag)

93025-2

Basis of Bearings

The Basis of Bearings of this map is based upon a Solar observation taken at the Northwest corner of Section 15.

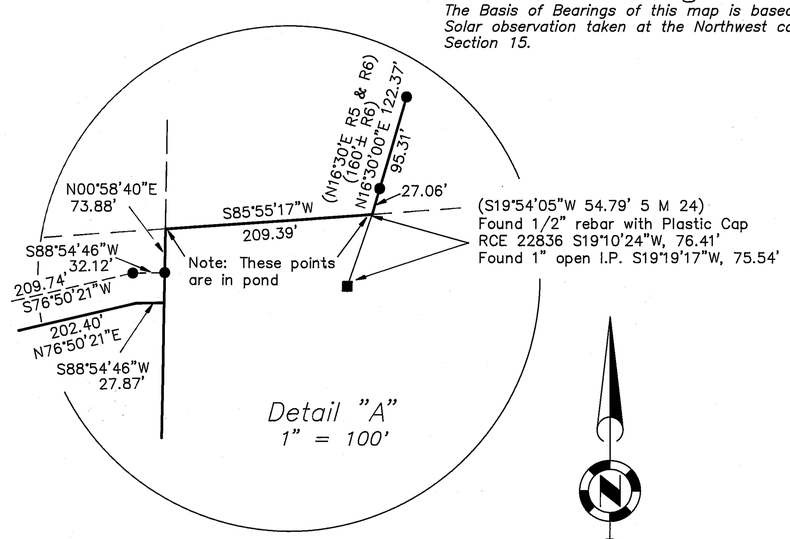

LINE	DIRECTION	DISTANCE
L1	N89°57'21"E	79.06'
L2	S80°36'34"E	113.57'
L3	N74°07'36"E	237.33'
L4	N82°59'30"E	267.11'
L5	N61°02'14"E	434.07'
L6	S61°02'14"W	432.42'
L7	S82°59'30"W	263.62'
L8	S74°07'36"W	232.93'
L9	N80°36'34"W	109.32'
L10	S89°57'21"W	80.56'

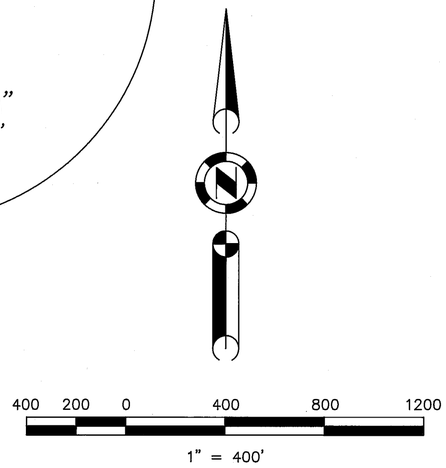

LEGEND

- ■ *FOUND point as described*
- ⊡ *SET as described*
- ● *SET 5/8" rebar with Aluminum Cap LS 2843*
- ○ *Computed point*
- *(R1) RECORD per 9 RS 80*
- *(R2) RECORD per 4 RS 32*
- *(R3) RECORD per 7 RS 56*
- *(R4) RECORD per 2 RS 112*
- *(R5) RECORD per 501 OR 138*
- *(R6) RECORD per 540 OR 181*

RECORD OF SURVEY
for
John & Karin Schlobohm
and
Soper Wheeler Company

Portion of Sections 10, 15 & 16
T. 23 N., R. 11 E., M.D.M.
Plumas County ~ California
Scale 1" = 400' September, 1993

Hamby Surveying Inc.
P.O. Box 1209
Portola, CA 96122
(916) 832-5571