

MONUMENTATION

| POINT | | NAD 83 EPOCH 1991.35 GEODETIC COORDINATES (D-M-S) | | | 95% STANDARD ERROR (m) | | | CCS 83 ZONE 1 (1991.35) (m) | | DESCRIPTION | REFERENCE | COMBINED GRID FACTOR | CONVERGENCE (D-M-S) |
|-------------|---------|---|-----------------|-------------|------------------------|-------|-------|-----------------------------|-------------|---|-----------|----------------------|---------------------|
| NAME | NGS PID | LATITUDE (N) | LONGITUDE (W) | EL. HT. (m) | LAT. | LONG. | E. H. | NORTHING | EASTING | | | | |
| QUINCY 7221 | KSI340 | 39-58-28.37545 | 120-56-39.88254 | 1106.41 | FIXED | FIXED | FIXED | 571743.856 | 2090172.609 | FOUND PER NGS DATA SHEET | | 0.99983331 | 0-41-24.8 |
| CRESCENT | LTO149 | 40-06-30.45888 | 120-54-28.56730 | 1055.27 | FIXED | FIXED | FIXED | 586649.723 | 2093103.110 | FOUND PER NGS DATA SHEET | | 0.99980926 | 0-42-50.7 |
| CM 47.81 | | 39-56-09.44615 | 120-51-54.94644 | 1038.71 | FIXED | FIXED | FIXED | 567543.714 | 2096988.955 | FOUND 3/4" REBAR AND ALUMINUM CALTRANS CAP STAMPED "CM 47.81" | 12 RS 28 | 0.99985414 | 0-44-31.2 |
| CM 46.80 | | 39-56-05.73254 | 120-52-58.63447 | 1045.59 | 0.005 | 0.005 | 0.006 | 567409.755 | 2095478.391 | SET 3/4" REBAR AND ALUMINUM CALTRANS CAP STAMPED "CM 46.80" | | 0.99985334 | 0-43-49.5 |
| CM 45.42 | | 39-56-03.02894 | 120-54-27.33544 | 1043.53 | 0.006 | 0.006 | 0.007 | 567299.822 | 2093373.533 | SET 3/4" REBAR AND ALUMINUM CALTRANS CAP STAMPED "CM 45.42" | | 0.99985386 | 0-42-51.5 |
| CM 45.16 | | 39-56-04.86736 | 120-54-45.53225 | 1039.23 | 0.007 | 0.006 | 0.007 | 567351.146 | 2092940.804 | SET 3/4" REBAR AND ALUMINUM CALTRANS CAP STAMPED "CM 45.16" | | 0.99985440 | 0-42-39.6 |
| CM 44.20 | | 39-56-06.40779 | 120-55-50.85464 | 1036.72 | 0.007 | 0.006 | 0.008 | 567379.569 | 2091389.359 | SET 3/4" REBAR AND ALUMINUM CALTRANS CAP STAMPED "CM 44.20" | | 0.99985468 | 0-41-56.9 |
| CM 43.11 | | 39-56-14.50286 | 120-56-58.28277 | 1019.15 | 0.006 | 0.006 | 0.007 | 567609.864 | 2089785.513 | SET 3/4" REBAR AND ALUMINUM CALTRANS CAP STAMPED "CM 43.11" | | 0.99985682 | 0-41-12.8 |
| CM 42.53 | | 39-56-40.09054 | 120-57-19.45836 | 1021.14 | 0.006 | 0.006 | 0.008 | 568393.002 | 2089273.378 | SET 3/4" REBAR AND ALUMINUM CALTRANS CAP STAMPED "CM 42.53" | | 0.99985459 | 0-40-59.0 |
| CM 41.95 | | 39-57-08.33527 | 120-57-34.71612 | 1025.91 | 0.007 | 0.007 | 0.009 | 569259.786 | 2088900.840 | SET 3/4" REBAR AND ALUMINUM CALTRANS CAP STAMPED "CM 41.95" | | 0.99985175 | 0-40-49.0 |
| CM 41.51 | | 39-57-25.48447 | 120-57-19.26030 | 1044.04 | 0.007 | 0.007 | 0.008 | 569793.047 | 2089261.388 | SET 3/4" REBAR AND ALUMINUM CALTRANS CAP STAMPED "CM 41.51" | | 0.99984765 | 0-40-59.1 |

TO OBTAIN GROUND DISTANCES DIVIDE GRID DISTANCE BY COMBINED GRID FACTOR

THIS R.O.S. WAS PREPARED AND FILED TO SATISFY SECTION 8813 OF THE PUBLIC RESOURCES CODE FOR SUBSEQUENT SURVEYING SEGMENTS OF PROJECT E. A. 32590 AND MAKES NO TIES TO TITLE LINES

BEARINGS, DISTANCES, AND COORDINATES ARE BASED ON THE CALIFORNIA COORDINATE SYSTEM OF 1983, ZONE 1, EPOCH 1991.35-CCS 83 ZONE 1 (1991.35)

ADDITIONAL INFORMATION MAY BE OBTAINED FROM FILE 99325900 IN THE CALTRANS DISTRICT 2 SURVEYS OFFICE

THIS SURVEY MEETS OR EXCEEDS THE GROUP "C" ORDER 2-1 ACCURACY STANDARD AS DEFINED IN THE FEDERAL GEODETIC CONTROL SUBCOMMITTEE PUBLICATION "GEOMETRIC GEODETIC ACCURACY STANDARDS AND SPECIFICATIONS FOR USING GPS RELATIVE POSITIONING TECHNIQUES" REPRINTED WITH CORRECTIONS ON AUGUST 1, 1989 AND CONFORMS TO SECOND ORDER SURVEYS AS DEFINED IN THE CALIFORNIA DEPARTMENT OF TRANSPORTATION SPECIFICATIONS FOR GPS SURVEYS DATED JANUARY 2002

RECORDER'S STATEMENT

FILED THIS 24th DAY OF July 2003
 AT 9:28 A.M.
 IN BOOK 12 OF RECORD OF SURVEYS AT PAGE 140
 AT THE REQUEST OF THE COUNTY SURVEYOR

(SIGNED) _____
 COUNTY RECORDER
 BY (SIGNED) Danny Samuel
 DEPUTY COUNTY RECORDER
 NO FEE: STATE BUSINESS DOC# 2003-8420

COUNTY SURVEYOR'S STATEMENT

THIS MAP HAS BEEN EXAMINED IN ACCORDANCE WITH SECTION 8766 OF THE PROFESSIONAL LAND SURVEYORS ACT THIS 23rd DAY OF July 2003



(SIGNED AND SEALED) R. Tom Hunter
 R. TOM HUNTER
 COUNTY SURVEYOR
 R.C.E. No. 30515
 LICENSE EXPIRATION DATE 3/31/2004



SURVEYOR'S STATEMENT



THIS MAP CORRECTLY REPRESENTS A GPS SURVEY MADE BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE REQUIREMENTS OF THE PROFESSIONAL LAND SURVEYORS ACT AT THE REQUEST OF THE DEPARTMENT OF TRANSPORTATION IN FEBRUARY AND MARCH 1999

(SIGNED AND SEALED) John Robert Leht
 L.S. No. 5582
 LICENSE EXPIRATION DATE 12/31/2005

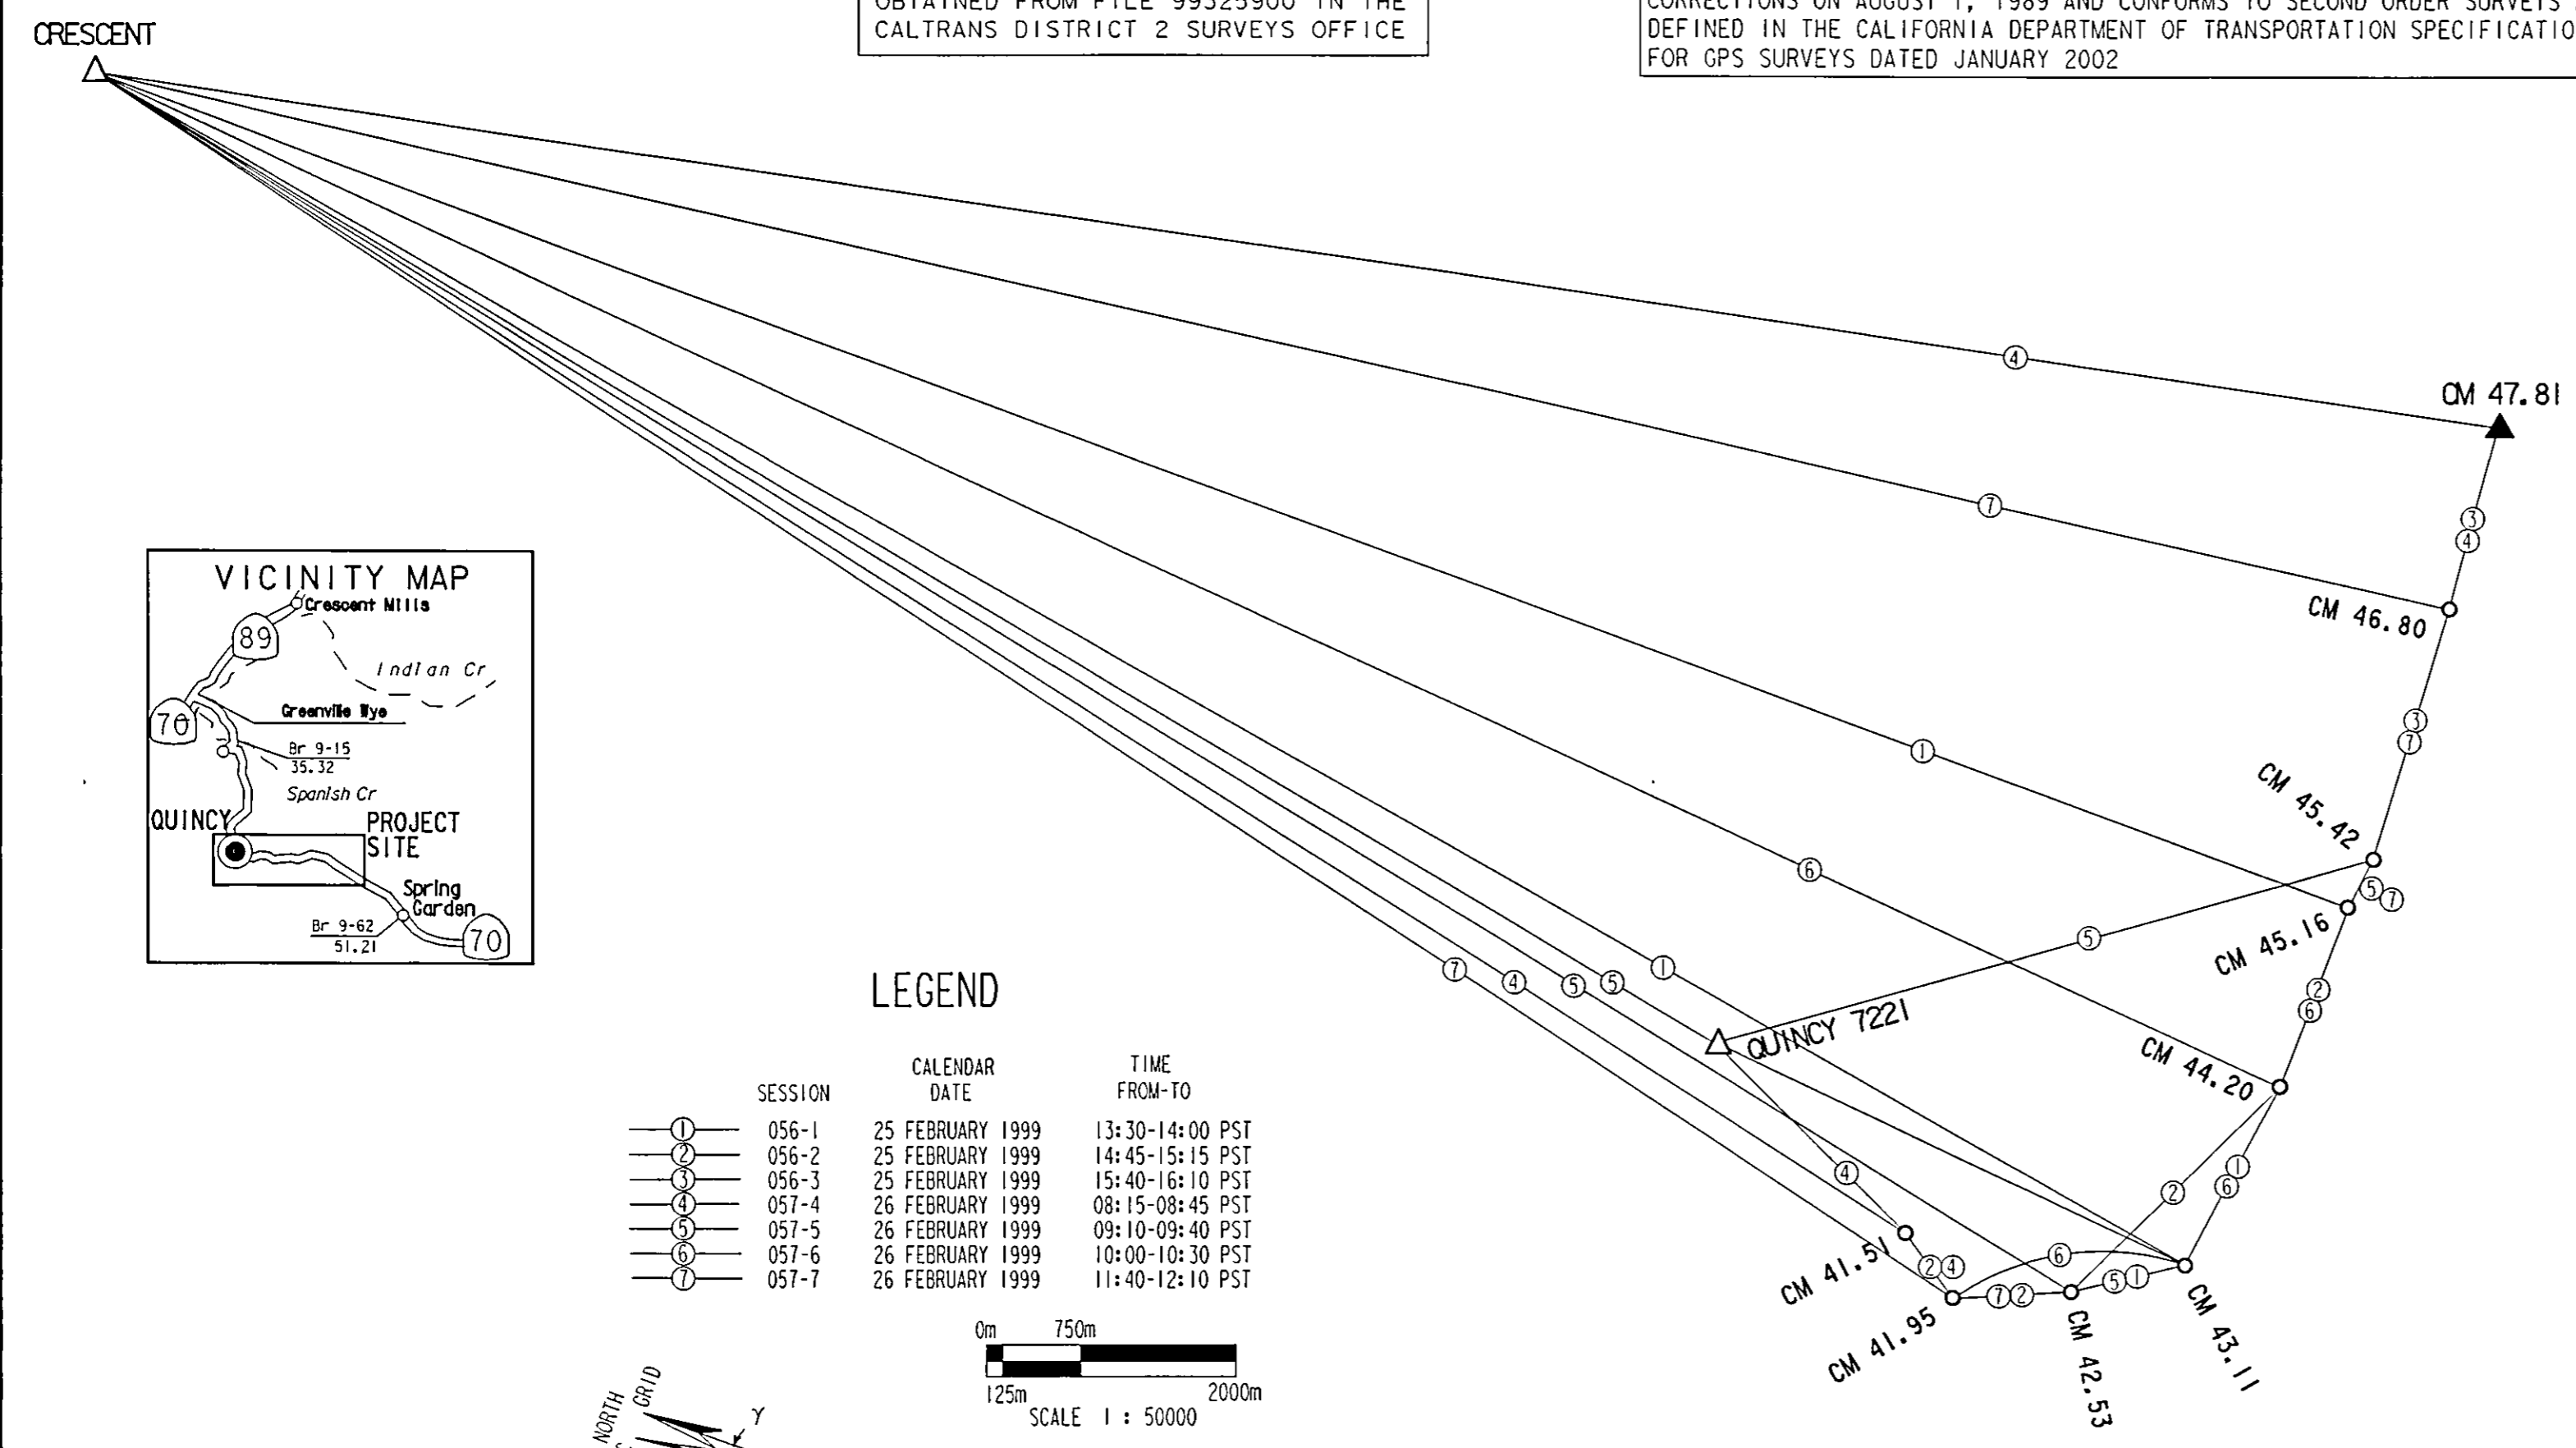

LEGEND

| SESSION | CALENDAR DATE | TIME FROM-TO |
|---------|------------------|-----------------|
| ① 056-1 | 25 FEBRUARY 1999 | 13:30-14:00 PST |
| ② 056-2 | 25 FEBRUARY 1999 | 14:45-15:15 PST |
| ③ 056-3 | 25 FEBRUARY 1999 | 15:40-16:10 PST |
| ④ 057-4 | 26 FEBRUARY 1999 | 08:15-08:45 PST |
| ⑤ 057-5 | 26 FEBRUARY 1999 | 09:10-09:40 PST |
| ⑥ 057-6 | 26 FEBRUARY 1999 | 10:00-10:30 PST |
| ⑦ 057-7 | 26 FEBRUARY 1999 | 11:40-12:10 PST |

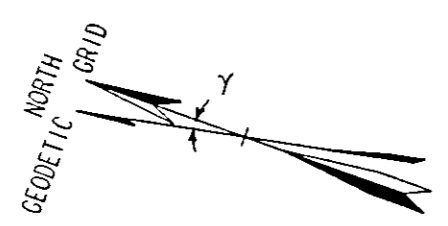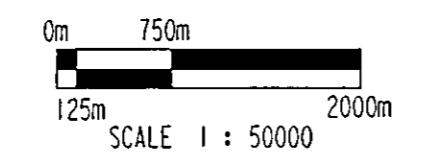

- △ CSRS-H CONTROL MONUMENT
- PROJECT CONTROL MONUMENT ESTABLISHED IN THIS SURVEY
- ▲ EXISTING GPS PROJECT CONTROL



STATE OF CALIFORNIA
 BUSINESS, TRANSPORTATION, AND HOUSING AGENCY
 DEPARTMENT OF TRANSPORTATION
RECORD OF SURVEY OF A GPS PROJECT CONTROL SURVEY
 IN THE CITY OF QUINCY, COUNTY OF PLUMAS, STATE OF CALIFORNIA, ALONG HIGHWAY ROUTE 70 P.M. 41.5/47.8
 IN SECTIONS 10, 14, 15, 24 T.24N., R.9E. AND
 IN SECTIONS 16, 19, 20 T.24N., R.10E.
 OF THE MOUNT DIABLO BASE AND MERIDIAN

DATE 20 APRIL 2003 SHEET 1 OF 1