


**BASIS OF BEARINGS**

CALIFORNIA ZONE 2, NAD 83 GRID  
 BEARINGS DERIVED FROM P.S.  
 OBSERVATIONS.  
 ADJUSTMENT DATE: 6-21-01  
 EPOCH DATE: 1997.0  
 MAPPING ANGLES SHOWN AT CORNER  
 NUMBERS 1 AND 4.  
 ALL DISTANCES SHOWN AS MEASURED  
 ARE GRID DISTANCES. TO CONVERT TO  
 GROUND, DIVIDE DISTANCES SHOWN BY  
 0.99979.

CORS STATION  
 QUINCY ARP  
 N 2482687.38  
 E 6857516.75

**LEGEND**

- SET MONUMENT - SEE CORNER NOTES
- FOUND CORNER - SEE CORNER NOTES
- CALCULATED POINT
- ⊗ CORNER NUMBER
- LINES MARKED AND POSTED
- ( ) 1 RECORD PER MINERAL SURVEY 2541
- ( ) 2 RECORD PER MINERAL SURVEY 2522
- HB HEALED BLAZE



**SURVEYOR'S STATEMENT**

THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE REQUIREMENTS OF THE LAND SURVEYORS' ACT AT THE REQUEST OF THE US FOREST SERVICE IN JULY, 2001

SIGNED *Fred W. Cook*  
 FRED W. COOK, L.S. 3966

**COUNTY SURVEYOR'S STATEMENT**

THIS MAP HAS BEEN EXAMINED IN ACCORDANCE WITH SECTION 8766 OF THE LAND SURVEYORS' ACT THIS 15<sup>th</sup> DAY OF April, 2002.

SIGNED *R. Tom Hunter*  
 PLUMAS COUNTY SURVEYOR  
 R. TOM HUNTER, R.C.E. 30515  
 REG. EXP. 3/31/04

**COUNTY RECORDER'S STATEMENT**

FILED THIS 19<sup>th</sup> DAY OF April, 2002, AT 11:20 A. M. IN BOOK 12 OF RECORD OF SURVEYS AT PAGE 55, AT THE REQUEST OF THE PLUMAS COUNTY SURVEYOR.

PLUMAS COUNTY RECORDER  
 JUDITH WELLS


BY *Dotty Samuel*  
 DEPUTY

FEE \$ 8<sup>00</sup> DOC.# 2002-3632

**RECORD OF SURVEY**

FOR  
 USDA FOREST SERVICE  
 PLUMAS NATIONAL FOREST

"UPPER SLATE 1"  
 IN SECTIONS 24 AND 25 T 22 N, R 9 E,  
 MDM IN THE UNINCORPORATED AREA OF  
 PLUMAS AND SIERRA COUNTIES,  
 STATE OF CALIFORNIA

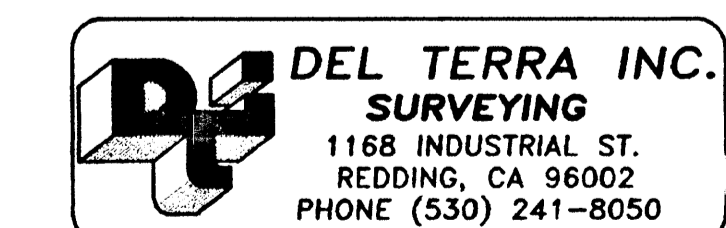

SCALE: 1" = 500' DATE: AUGUST, 2001


SHEET 1 OF 1

SEC. 24

SEC. 25

R 9 E  
 R 10 E

PLUMAS Co.  
 SIERRA Co.



CORS STATION  
 CHICO 1 ARP  
 N 2283746.02  
 E 6656301.91

GM4 MS 2522 2001  
 CORNER No. 1  
 FD. A MOUND OF STONE. SET A STANDARD USFS DRIVE IN MONUMENT. CORNER FALLS ON A FLAT TIMBERED RIDGE TOP, 150'± SOUTH OF A BREAK.  
 FD. A 34" RED FIR, S3°W, 29.1' -HB  
 REC. A BLACK FIR, S7°13'E, 28.3' (MS 2522)  
 SCRIBED A 9" RED FIR, N63°W, 8.6'  
 "GM4 MS 2522 BT"

MS 2522 GM5 MS 2541 2001  
 CORNER No. 2  
 FD. A 4' DIA. X 1' HIGH MOUND OF STONE. SET A STANDARD USFS DRIVE IN MONUMENT. CORNER FALLS 30' EAST OF A RIDGE ROAD.  
 SCRIBED AN 8" WHITE FIR, S26°W, 11.7'  
 "GM5 MS2522 BT"  
 SCRIBED A 7" WHITE FIR, S88°E, 10.1'  
 "GM5 MS2522 BT"

LS 3966 2001  
 CORNER No. 3  
 FD. A 5' DIA. X 2' HIGH MOUND OF STONE. SET A STANDARD USFS DRIVE IN MONUMENT. CORNER FALLS 100' EAST OF RIDGE TOP AND 80' SOUTH OF RIDGE ROAD.  
 SCRIBED A 10" WHITE FIR, S30°W, 25.1'  
 "CCNW MS2541 BT"  
 SCRIBED AN 11" RED FIR, S76°E, 18.6'  
 "CCNW MS2541 BT"

CCNE MS 2541 2001  
 CORNER No. 4  
 FD. A 1" IRON PIPE IN A MOUND OF STONE. SET A STANDARD USFS DRIVE IN MONUMENT. LAID PIPE ALONGSIDE. CORNER FALLS ON THE MODERATE EAST SLOPE OF A FINGER SPUR, 150' NORTH OF MINE.  
 FD. AN 11" WHITE FIR, S77°E, 22.6' -HB  
 NO RECORD FOUND  
 SCRIBED A 9" WHITE FIR, N1°E, 17.6'  
 "CCNE MS2541 BT"

T22N R9E 1/4 S24 S25 2001  
 CORNER No. 5  
 FD. A 14 X 10 X 3 INCH STONE MARKED 1/4 ON NORTH FACE (14 X 12 X 8 GLO) IN A MOUND OF STONE. SET A STANDARD USFS DRIVE IN MONUMENT AND DEPOSITED MARKED STONE AT BASE OF MOUND. CORNER FALLS ON A MODERATE EAST SLOPE, 360' EAST OF THE TOP OF A RIDGE.

FD. A 32" WHITE FIR, S11°E, 16.1' -HB  
 REC. AN 18" FIR, S11°25'E, 15.8' (MS 2522)  
 SCRIBED AN 11" WHITE FIR, N41°W, 14.4'  
 "1/4 S24 BT"

CORNER No. 6  
 FD. A 3/4" IRON PIPE IN A MOUND OF STONE.  
 REC. MOUND OF STONE - NO TREES.

CALC'D TIE TO 1/4 COR IS A TIE ONLY AND NOT INTENDED TO BE ON THE SECTION LINE

CORNER No. 7  
 FD. AN EMBEDDED MOUND OF STONE.  
 FD. A LARGE GRANITE BOULDER, N88°E, 56.5' - NO MARKS  
 REC. A GRANITE BOULDER, N88°37'E, 56.5' ( )2  
 REC. BOULDER TO SOUTHEAST MOVED BY ROAD CONSTRUCTION.

