


NE 1/16 • S3 LS 4753 2002	CORNER No. 151 SET A 3 1/4" ALUM. CAP ON A 3/4" ALUM ROD IN A MOUND OF STONE. CORNER FALLS ON A MODERATE WEST SLOPE IN SCATTERED PINE AND JUNIPER. SCRIBED AN 8" PONDEROSA PINE, N19°E, 12.0' "NE 1/16 S3 BT" SCRIBED A 15" INCENSE CEDAR, S60°E, 8.1' "NE 1/16 S3 BT"	SW 1/16 • S3 LS 4753 2002	CORNER No. 161 SET A 3 1/4" ALUM. CAP ON A 3/4" ALUM ROD IN A MOUND OF STONE. CORNER FALLS ON A STEEP WEST SLOPE IN TIMBER AND BRUSH. SCRIBED A 9" DOUGLAS FIR, S76°E, 23.9' "SW 1/16 S3 BT" SCRIBED A 12" INCENSE CEDAR, S6°E, 6.0' "SW 1/16 S3 BT"	CORNER NOTES	
				<p>HB = HEALED BLAZE VS = VISIBLE SCRIBING BCIP = BRASS CAPPED IRON PIPE</p> <p>()1 RECORD PER 5 R/S 110 ()2 RECORD PER 9 R/S 50 ()3 RECORD PER 10 PM 86 ()4 RECORD PER 4 R/S 86 ()5 RECORD PER 4 PM 92 ()6 RECORD PER 3 PM 9 ()7 RECORD PER 2 R/S 30 ()8 RECORD PER 11 R/S 141 ()9 RECORD PER 7 R/S 26 ()10 RECORD PER 3 R/S 71 ()11 RECORD PER 8 M 33 ()12 RECORD PER 8 R/S 92 ()13 RECORD PER 11 R/S 141</p>	
N 1/16 S3 S2 LS 4753 2002	CORNER No. 152 SET A 3 1/4" ALUM. CAP ON A 3/4" ALUM ROD IN A MOUND OF STONE. CORNER FALLS ON A STEEP SOUTH SLOPE IN THICK TIMBER. SCRIBED A 14" DOUGLAS FIR, N24°W, 8.1' "N 1/16 S3 BT" SCRIBED A 7" WHITE FIR, N56 1/4°E, 22.1' "N 1/16 S2 BT"	S 1/16 C C S3 LS 4753 2002	CORNER No. 162 SET A 3 1/4" ALUM. CAP ON A 3/4" ALUM ROD IN A MOUND OF STONE. CORNER FALLS ON A TIMBERED FLAT. SCRIBED A 7" DOUGLAS FIR, N88 1/4°W, 4.0' "CS 1/16 S3 BT" SCRIBED A 7" INCENSE CEDAR, S3 3/4°E, 7.9' "CS 1/16 S3 BT"		
T21N R13E 1/4 SS S4 1975	CORNER No. 153 FD. A BLM BCIP IN A MOUND OF STONE. 1" PIPE ALONGSIDE. CORNER FALLS ON A GENTLE SOUTHWEST SLOPE, 130°± EAST OF HWY 89. FD. A 17" PONDEROSA PINE, S8°E, 33.7' -HB REC. A 17" JEFFREY PINE, S8°E, 51 LKS (BLM 1975) FD. A 19" PONDEROSA PINE, N22°W, 10.6' -HB REC. A 14" JEFFREY PINE, N22°W, 16 LKS (BLM 1975)	SE 1/16 • S3 LS 4753 2002	CORNER No. 163 SET A 3 1/4" ALUM. CAP ON A 3/4" ALUM ROD IN A SMALL MOUND OF STONE. CORNER FALLS ON A MODERATE NORTHEAST SLOPE IN THICK REPRODUCTION TIMBER. SCRIBED A 7" WHITE FIR, S17°W, 14.9' "SE 1/16 S3 BT" SCRIBED A 9" JEFFREY PINE, N77 1/2°W, 14.1' "SE 1/16 S3 BT"	T21N R13E	
				1/4 S3 S10 1975	CORNER No. 172 FD. A BLM BCIP IN A MOUND OF STONE. CORNER FALLS ON A MODERATE SOUTHWEST SLOPE, 50°± NORTH OF A SKID ROAD. FD. A 28" DOUGLAS FIR, N37°E, 57.4' -HB REC. A 23" DOUGLAS FIR, N36 1/2°E, 86 LKS (BLM 1975)
T21N R13E 1/4 S4 S3 1975	CORNER No. 155 FD. A BLM BCIP IN A MOUND OF STONE. CORNER FALLS ON A TIMBERED, GENTLE WEST SLOPE. FD. AN 11" PONDEROSA PINE, N44°E, 13.9' -HB REC. A 10" JEFFREY PINE, N44°E, 21 LKS (BLM 1975) FD. A 23" PONDEROSA PINE, S29°E, 3.0' -HB NO RECORD FD. AN 18" PONDEROSA PINE, S86°W, 37.6' -HB REC. A 15" YELLOW PINE, S86°W, 57 LKS (BLM 1975)	T21N R13E S5 S4 S8 S9 1975	CORNER No. 168 FD. A BLM BCIP IN A MOUND OF STONE. 1" PIPE ALONGSIDE. CORNER FALLS ON A MODERATE EAST SLOPE IN TIMBER, 40°± WEST OF A RAVINE. FD. A 32" DOUGLAS FIR, S62 1/2°W, 16.5' -HB REC. A 31" DOUGLAS FIR, S61 1/2°W, 25 LKS (BLM 1975) FD. A 14" DOUGLAS FIR, S39°E, 19.8' -HB REC. AN 11" DOUGLAS FIR, S39°E, 30 LKS (BLM 1975) FD. A 15" PONDEROSA PINE, N10°W, 15.8' -HB REC. A 10" YELLOW PINE, N10°W, 24 LKS (BLM 1975) FD. A 24" INCENSE CEDAR, N7 1/2°E, 40.3' -HB REC. A 22" CEDAR, N9°E, 65 LKS (BLM 1975)	E 1/16 • S3 S10 1985	
				E 1/16 • S3 S10 1985	CORNER No. 173 FD. A BLM BCIP IN A MOUND OF STONE. CORNER FALLS ON A STEEP NORTHWEST SLOPE, 40°± SOUTH OF A RAVINE. FD. A 17" INCENSE CEDAR, N8 1/4°W, 74.6' -HB REC. AN 11" CEDAR, N8 1/4°W, 113 LKS (BLM) FD. A 21" WHITE FIR, S31°W, 10.6' -HB REC. A 17" WHITE FIR, S31°W, 16 LKS (BLM)
T21N R13E C 1/4 S3 LS 4753 2002	CORNER No. 156 SET A 3 1/4" ALUM. CAP ON A 3/4" ALUM ROD IN A MOUND OF STONE. CORNER FALLS ON AN OPEN, GENTLY SLOPING SOUTH FACING SPUR. SCRIBED A 14" INCENSE CEDAR, N31 1/2°W, 58.1' "C 1/4 S3 BT" SCRIBED A 14" FORKED JUNIPER, N85 1/2°E, 46.1' "C 1/4 S3 BT"	W 1/16 • S4 S9 1985	CORNER No. 169 FD. A BLM BCIP IN A MOUND OF STONE. CORNER FALLS ON A STEEP WEST SLOPE IN TIMBER, 160°± EAST OF HWY 89. FD. A 20" PONDEROSA PINE, N15°E, 31.0' -HB REC. A 20" PONDEROSA PINE, N15°E, 47 LKS (BLM) FD. AN 11" PONDEROSA PINE, S31°W, 54.4' -HB REC. A 10" PONDEROSA PINE, S31°W, 82.5 LKS (BLM)	T21N R13E S3 S2 S10 S11 1975	
				T21N R13E S3 S2 S10 S11 1975	FD. A BLM BCIP IN A MOUND OF STONE. CORNER FALLS ON A MODERATE EAST SLOPE IN TIMBER AND BRUSH, 200°± WEST OF A ROAD. FD. A 14" WHITE FIR, S26°E, 9.2' -HB REC. A 5" WHITE FIR, S26°E, 14 LKS (BLM 1975) FD. A 55" PONDEROSA PINE, S49°W, 42.9' -HB REC. A 51" YELLOW PINE, S47 3/4°W, 65 LKS (BLM 1975) FD. A 17" DOUGLAS FIR, N70°W, 54.8' -HB REC. AN 11" DOUGLAS FIR, N70°W, 83 LKS (BLM 1975)
T21N R13E E 1/6 C—C S3 LS 4753 2002	CORNER No. 157 SET A 3 1/4" ALUM. CAP ON A 3/4" ALUM ROD IN A MOUND OF STONE. CORNER FALLS ON A GENTLE EAST SLOPE IN TIMBER, 75°± WEST OF AN OLD RAILROAD GRADE. SCRIBED A 9" DOUGLAS FIR, S10 1/4°W, 24.0' "CE 1/16 S3 BT" SCRIBED A 7" WHITE FIR, N67 1/4°W, 33.1' "CE 1/16 S3 BT"	T21N R13E S4 S9 1975	CORNER No. 170 FD. A BLM BCIP IN A MOUND OF STONE. 1" PIPE ALONGSIDE. CORNER FALLS ON TOP OF A STEEP NORTH SLOPE IN TIMBER. FD. A 39" DOUGLAS FIR, N33°E, 10.6' -HB REC. A 36" DOUGLAS FIR, N30°E, 17 LKS (BLM 1975) FD. A 38" DOUGLAS FIR, S23 1/2°E, 21.1' -HB REC. A 36" DOUGLAS FIR, S23 1/2°E, 32 LKS (BLM 1975)	T21N R13E S2 S11 LS 4753 2002	
				T21N R13E S2 S11 LS 4753 2002	FD. GLO RECORD 26 X 10 X 10 INCH UNMARKED STONE IN A MOUND OF STONE. SET A 3 1/4" ALUM. CAP ON A 3/4" ALUM ROD WITH STONE AT BASE AND REBUILT MOUND. CORNER FALLS ON A MODERATE EAST SLOPE. FD. REMAINS OF PINE, S46°W, 60.7' REC. A 34" PITCH PINE, S46°W, 92 LKS (GLO) SCRIBED A 13" JEFFREY PINE, N21°E, 14.9' "1/4 S2 BT" SCRIBED A 10" WHITE FIR, S57°E, 33.9' "1/4 S11 BT"
T21N R13E 1/4 S3 S2 LS 4753 2002	CORNER No. 158 SET A 3 1/4" ALUM. CAP ON A 3/4" ALUM ROD IN A MOUND OF STONE. CORNER FALLS ON A GENTLE WEST SLOPE IN SCATTERED TIMBER, 75°± WEST OF A ROAD. SCRIBED AN 18" PONDEROSA PINE, S49°W, 13.8' "1/4 S3 BT" SCRIBED A 12" PONDEROSA PINE, S49°E, 6.5' "1/4 S2 BT"	T21N R13E S4 S3 S9 S10 1975	CORNER No. 171 FD. A BLM BCIP IN A MOUND OF STONE. CORNER FALLS ON A GENTLE SOUTHWEST SLOPE IN THICK TIMBER. FD. A 12" WHITE FIR, S73°W, 9.9' -HB REC. AN 8" WHITE FIR, S73°W, 14 LKS (BLM 1975) FD. A 10" WHITE FIR, DEAD AND DOWN, S4°E, 7.9' -HB REC. A 7" WHITE FIR, S4°E, 12 LKS (BLM 1975) FD. A 10" WHITE FIR SNAG, N23°E, 14.5' -HB REC. A 9" WHITE FIR, N23°E, 22 LKS (BLM 1975)	T21N R13E S2 S11 LS 4753 2002	
				T21N R13E S2 S11 LS 4753 2002	CORNER No. 185 SET A 3 1/4" ALUM. CAP ON A 3/4" ALUM ROD IN A MOUND OF STONE. CORNER FALLS ON A STEEP EAST SLOPE IN TIMBER. SCRIBED A 9" PONDEROSA PINE, S57°E, 25.3' "CW 1/16 S3 BT" SCRIBED A 6" DOUGLAS FIR, N28 3/4°W, 27.0' "CW 1/16 S3 BT"

RECORD OF SURVEY

FOR
USDA FOREST SERVICE
PLUMAS NATIONAL FOREST

"MAYBIE"

IN SECTIONS 34, 35 AND 36, T. 23 N, R. 13 E.,
SECTION 31, T. 23 N, R. 14 E.,
SECTION 25, T. 22 N, R. 12 E.,
SECTIONS 16, 17, 18, 28, 29, 30 AND 33,
T. 22 N, R. 13 E.,
SECTIONS 5, 6, 7, 8 AND 9, T. 22 N, R. 14 E.,
AND SECTIONS 3 AND 4, T. 21 N, R. 13 E., M.D.M.,
IN THE UNINCORPORATED AREA OF PLUMAS COUNTY,
STATE OF CALIFORNIA

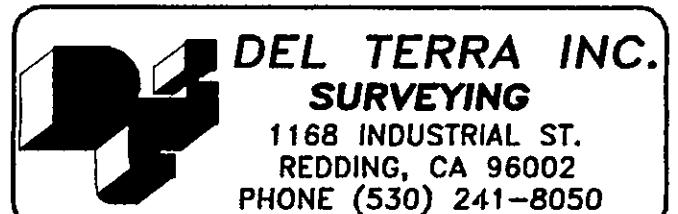

SCALE: NONE DATE: AUGUST, 2003
SHEET 11 OF 11