

CORNER NOTES

- ① The 1/4 sec. cor. of secs. 25 and 30 on the East bdy. of T.26N.,R.8E.,M.D.M., monumented w/a G.L.O. brass cap mon., 1" dia., in a m.o.s. w/ 2" cap mkd.

1/4
S25 | S30
1940

- f.w.b. a 25" S.Pine S 79°58' W 54.8 lks. w/ hld. blz. (Record: S 80° W 54 lks.)
a 21" D. Fir N 46°02' W 134.3 lks. w/ hld. blz. (Record: N 46° W 134 lks.)
a 21" W. Fir N 25°17' W 13.9 lks. w/ opened, rotted blz. (Record: N 25° W 14 lks.)

- ② At the point for the S 1/16 sec. cor. of secs. 25 and 30, set an aluminum post, 30" long, 2 1/2" dia., 24" in ground, w/ aluminum 3" cap mkd.

T26N
R8E R9E
S1/16
S25 | S30
LS 5287
1985

- f.w.b. a 7" S.Pine N 51°30' E 6.9 ft. mkd. "S1/16S30BT"
a 9" S.Pine N 10°45' W 16.0 ft. mkd. "S1/16S25BT"

- ③ The cor. of secs. 25, 30, 31, and 36 on the East bdy. of T.26N.,R.8E.,M.D.M., monumented w/ a G.L.O. brass cap mon., 2" dia., in a m.o.s. w/ 2" cap mkd.

T26N	T26N	T26N
S25 S30	R8E R9E	
S36 S31	S25 S30	
R8E R9E	S36 S31	
1940	1940	
Record		

- f.w.b. a 23 1/2" S.Pine N 74°19' E 76.8 lks. w/ hld. blz. (Record: N 72° E 78 lks.)
a 20" S.Pine S 21°21' E 45.6 lks. w/ hld. blz. (Record: S 28° E 46 lks.)
a 25" D. Fir S 77°53' W 34.0 lks. w/ hld. blz. (Record: S 78° W 33 lks.)
a 30" S.Pine N 76°11' W 36.8 lks. w/ hld. blz. (Record: N 74 3/4° W 36 lks.)

ABBREVIATIONS

sec.	section	mkd.	marked
secs.	sections	bdy.	boundary
cor.	corner	m.o.s.	mound of stone
mon.	monument	f.w.b.	from which bears
dia.	diameter	S.Pine	Sugar Pine
lks.	links	D. Fir	Douglas Fir
ft.	feet	W. Fir	White Fir
hld.	healed	G.L.O.	Government Land Office (predecessor to the U.S. Bureau of Land Management)
blz.	blaze		

SURVEY HISTORY

The original survey of the Range line was executed by D.D. Brown, U.S. Deputy Surveyor, under his contract of August 10, 1869.

The resurvey of the Range line was executed by R.F. Wilson, Cadastral Engineer, and H.A. Johnston, Public Land Surveyor, under special instructions dated June 1, 1926 for Group No. 161.

No other surveys of record.

SCALE 1" = 300'


BASIS OF BEARING

The bearings shown on this map are based on True North as established by the mean of solar observations made in the vicinity of the section corner common to Sections 25 and 36, T.26N.,R.8E., and Sections 30 and 31, T.26N.,R.9E., M.D.M. on October 31, 1985.

Latitude: 40°04'34"
Longitude: 121°01'17"

LEGEND

- ◇ Found G.L.O. mon. as noted
○ Set U.S. Forest Service mon. as noted
— Posted and blazed property boundary

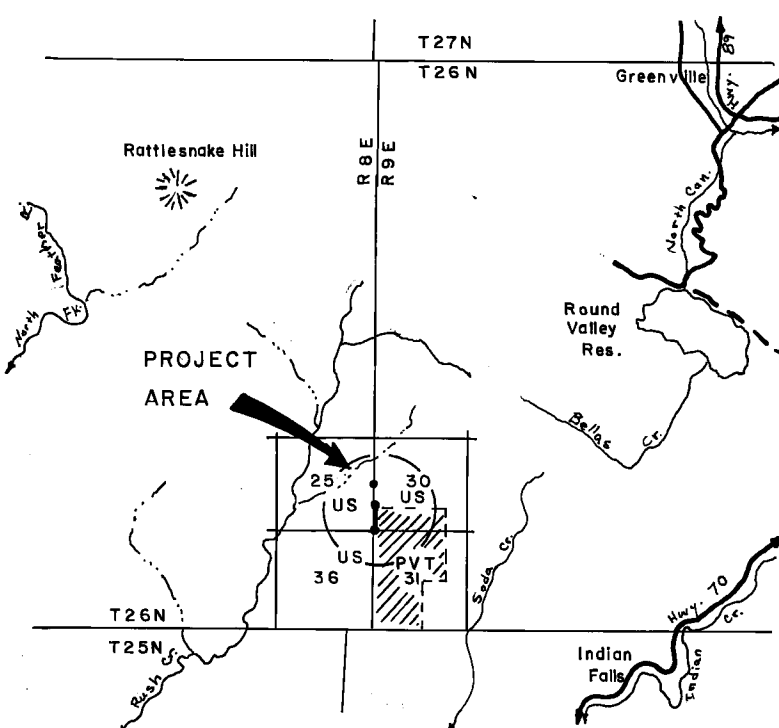

VICINITY MAP
SCALE 1/2" = 1 mile

SURVEYOR'S STATEMENT

This map correctly represents a survey made by me or under my direction in conformance with the requirements of the Land Surveyors' Act at the request of the Plumas National Forest in September, 1985.

Robert A. Graubeger
Robert A. Graubeger, LS 5287
GRAUBERGER
L.S. 5287
STATE OF CALIFORNIA

COUNTY SURVEYOR'S STATEMENT

This map has been examined in accordance with Section 8766 of the Land Surveyors' Act this 6th day of February, 1986.

Lawrence J. Brock
Lawrence J. Brock, RCE 13528
Plumas County Surveyor

COUNTY RECORDER'S CERTIFICATE

Filed this 6th day of February, 1986, at 2:11 P.M. in Book 7 of Records of Survey at page 66, at the request of the Plumas County Surveyor.

Fee \$ 500
File No. 4788

Ila Diggs
Plumas County Recorder

by *Bob Cammack*
Deputy

RECORD OF SURVEY

A Retracement Of A Portion Of The Range Line And Establishment Of The S1/16 Section Corner Common To Section 25, T.26N.,R.8E., And Section 30, T.26N.,R.9E.,M.D.M. In The Unincorporated Area Of Plumas County, California For The Plumas National Forest.

Robert A. Graubeger, LS 5287
Cadastral Surveys
Plumas National Forest

September 1985

Sheet 1 of 1