




1
RECORD: (GLO) MARKED A SUGAR PINE 40 INCHES DIAMETER FOR CORNER TO SECTIONS 1 AND 2, TOWNSHIP 21 NORTH, RANGE 12 EAST, AND 35 AND 36, TOWNSHIP 22 NORTH, RANGE 12 EAST.
FOUND: 36" DIA DECAYED STUMP W/1" IP NO TAG, APPROX CENTER OF STUMP W/K TAGS 1960, 1971, NO SCRIBING (ACCEPTED 1" OD IP AS BEST AVAILABLE EVIDENCE OF CORNER LOCATION, 4RS10)
FWB: 10" IC S49°20'E 17 FT. (CLOSED FACE, 4RS10)
8" PINE S45°35'W 26.6 FT. (CLOSED FACE, 4RS10)
SET: NOTHING AT CORNER (UNSUITABLE LOCATION FOR A PERMANENT MON)
FWB: STD USFS DRIVE-IN MON (RM) ON 36" OF ROD IN A 18"X18"X6" MOS N51°03'23"W 5.19 FT.
17" WF N59°09'E 17.6 FT. SCRIBED "T22 R12E S35 BT"

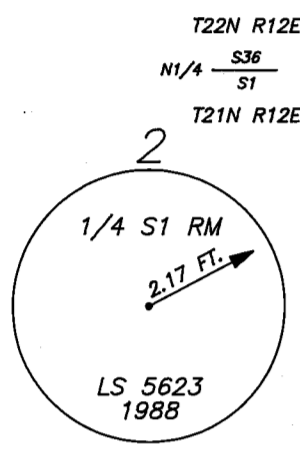


2
RECORD: (GLO) N 1/4 SET POST FOR QUARTER SECTION CORNER, FROM WHICH: A CEDAR 15 INCHES DIAMETER BEARS SOUTH 22-3/4' EAST 145 LINKS DISTANT.
FOUND: WOODEN FENCE POST RCE 15265 METAL TAG ON TOP (4 RS 117) ACCEPTED TAG AS BEST AVAILABLE EVIDENCE OF CORNER LOCATION
FWB: IC 42" DIA. S21°29'E 95.6 FT. "S" VISIBLE
SET: NOTHING AT CORNER (UNSUITABLE LOCATION FOR A PERMANENT MONUMENT)
FWB: STD USFS DRIVE-IN MON (RM) S53°18'15"W 2.17 FT. (1/4 S1 RM LS 5623 1988)
W.FIR 9" DIA N47°46'W 20.8 FT. SCRIBED "1/4S36BT"
I.CEDAR 15" DIA S02°29'E 29.0 FT. SCRIBED "1/4S1BT"

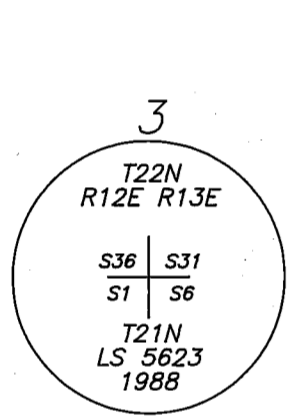

3
RECORD: (GLO) POST (KEDDIE)
FWB: 32" P.PINE S 66 3/4'W 152 LKS
38" P.PINE S 63'W 112 LKS
30" P.PINE N 68 3/4'E 96 LKS
4"X4" POST W/6 NOTCHES ON EACH CORNER (MINTO FOUND)
FWB: PITS AND MOUNDS (MINTO FOUND)
FOUND: STD. USFS MON. 8" AG IN A 18"X18"X6" MOS. (9RS56)
FWB: 45" PP SNAG S65°W 73.4 FT (1964 K TAG READS "BT-CORNER BEARS N 63'E 112 LKS) (9RS56)
19" IC N23°06'E 10.4 FT (9RS56)
16" PP S16°40'E 13.7 FT (9RS56)
19" PP S45°36'W 19.9 FT (9RS56)
SET: NOTHING




4
RECORD: (GLO) POST (KEDDIE)
FWB: 12" I.CEDAR S 49 1/4'W 37 LKS
17" I.CEDAR N 83'E 43 LKS
FOUND: STD. BLM MON. 2" ABOVE GROUND 36"X36"X2" M.O.S.
FWB: STUMP HOLE W/CEDAR STUMP LAYING ALONGSIDE S 49°57'W 24.1 FT (GLO)
36" I.CEDAR N 81°36'E 28.1 FT W/PARTIAL SCRIBING VISIBLE (GLO)
17" W.FIR N 00°47'E 19.9 FT (BLM 1975)
SET: NOTHING




5
RECORD: (GLO) 5"X8"X24" STONE (KEDDIE)
FOUND: 1/2" REBAR W/ALUM. CAP LS 2843 6" ABOVE GROUND 24"X24"X4" M.O.S. (6RS63 ACCEPTED POSITION AS BEST POSSIBLE LOCATION BASED ON TOPO CALLS)
FWB: NEW BT'S
9" W.FIR N 42 1/4'E 10.0 FT SCRIBED "T21NR13ES6BT" (9RS56)
17" W.FIR S 85 1/2'E 24.9 FT SCRIBED "T21NR13ES7BT" (9RS56)
8" W.FIR S 32 1/2'W 5.6 FT SCRIBED "T21NR12ES12BT" (9RS56)
11" W.FIR N 20 1/2'W 3.1 FT SCRIBED "T21NR12ES1BT" (9RS56)
SET: NOTHING




6
RECORD: (GLO) S 1/4 SEC1 SET POST 4 IN. DIA. 1 FT. IN EARTH 1 FT. ABOVE STONE MOUND 4 FT. DIA. AT BASE BY 2 FT. IN HIGHT FOR 1/4 SEC. FROM WHICH BEARS A FIR 36 IN. DIA. S.10°W. 91 LKS DIST. FIR 40 IN. DIA. N.39-1/2'E. 57 LKS. DIST.
FOUND: NOTHING
SET: NOTHING SET (CALCULATED POINT ONLY)




7
RECORD: (GLO) W 1/16 NOTHING
FOUND: NOTHING
SET: USFS DRIVE-IN MON 5" ABOVE GROUND (NO MOS)
FWB: W.FIR 18" DIA N62°50'E 8.8 FT. SCRIBED "W 1/16 S1 BT"
W.FIR 15" DIA N40°43'W 3.7 FT. SCRIBED "W 1/16 S1 BT"




8
RECORD: (GLO) SW SEC COR SEC1 SET 4"X4" POST 1 FT. IN EARTH AND 1 FT. ABOVE STONE MOUND 4 1/2 FT. DIA. AT BASE BY 2 FT. HIGH FOR COR. TO SECTIONS 1,2,11,12.
FWB: CEDAR 12" DIA S08°W 230 LKS DIST. PINE 24" DIA S20 1/2'E 190 LKS DIST.
FOUND: 3/4" IP NO TAG (ACCEPTED POSITION)
FWB: CEDAR 18" DIA. N07°14'E 150.92 FT.(DEAD & DOWN, SCRIBING VISIBLE)
WF 16" DIA. N76°00'W 38.38 FT.(CLOSED FACE)
WF 47" DIA. S06°23'W 49.47 FT.
SET: STD USFS DRIVE-IN MON ON 24" OF ROD FLUSH W/ A 36"X36"X10" MOS (NO BT'S SCRIBED)




9
RECORD: (GLO) S-S 1/64 NOTHING
FOUND: NOTHING
SET: STD DRIVE-IN MON ON 36" OF ROD IN A 36"X36"X8" MOS (NO BT'S)




10
RECORD: (GLO) S1/16 NOTHING
FOUND: NOTHING
SET: STD USFS DRIVE-IN MON ON 48" OF ROD 8" ABOVE GROUND IN A 36"X36"X8" MOS
FWB: WF 14" DIA. N77°58'E 13.5 FT. SCRIBED "S1/16 S2 BT"
WF 10" DIA. N87°03'E 34.3 FT. SCRIBED "S1/16 S2 BT"




11
RECORD: (GLO) W1/4 SEC1 SET POST 4 IN. DIA. 1 FT. IN EARTH 1 FT. ABOVE STONE MOUND 4 FT. DIA. AT BASE BY 2 FT. IN HIGHT FOR 1/4 SEC COR. FROM WHICH BEARS A FIR 30 IN. DIA. S.25'E. 56 LKS. DIST. CEDAR 10 IN. DIA. S.48'W. 5 LKS. DIST.
FOUND: NOTHING
SET: STD USFS DRIVE-IN MON ON 36" OF ROD 8" ABOVE GROUND IN A 24"X24"X8" MOS
FWB: W.FIR 6 1/2" DIA S64°43'W 4.4 FT. SCRIBED "1/4S2BT"
D.FIR 14" DIA S49°49'E 3.5 FT. SCRIBED "1/4S1BT"
1"OD IP W/METAL TAG RCE 11173 (4RS9) N02°00'19"E 243.69 (DID NOT ACCEPT)



12
RECORD: (GLO) CE 1/16 NOTHING
FOUND: NOTHING
SET: STD USFS DRIVE-IN MON ON 24" OF ROD 6" ABOVE GROUND IN A 24"X24"X6" MOS
FWB: WF 8" DIA. N40°07'W 37.7 FT. SCRIBED "CE1/16BT"
WF 7" DIA. N23°36'E 8.4 FT. SCRIBED "CE1/16BT"



13
RECORD: (GLO) C 1/4 NOTHING
FOUND: NOTHING
SET: NOTHING



14
RECORD: (GLO) N1/16 NOTHING
FOUND: NOTHING
SET: STD USFS DRIVE-IN MON ON 48" OF ROD 8" ABOVE GROUND IN A MOS
FWB: IC 23" DIA. S15°29'E 41.3 FT. SCRIBED "CN 1/16 S1 BT"
IC 22" DIA. S77°28'E 64.1 FT. SCRIBED "CS 1/16 S1 BT"

NONSTANDARD ABBREVIATIONS

FWB	FROM WHICH BEARS
BT	BEARING TREE
MOS	MOUND OF STONE
JN	JUNIPER
DF	DOUGLAS FIR
WF	WHITE FIR
RF	RED FIR
PP	PONDEROSA PINE
SP	SUGAR PINE
JP	JEFFREY PINE
IC	INCENSE CEDAR
MON	MONUMENT
RM	REFERENCE MONUMENT
AG	ABOVE GROUND

RECORD OF SURVEY

LOCATED IN SECTION 1 T21N R12E MDM, COUNTY OF PLUMAS, STATE OF CALIFORNIA FOR THE PLUMAS NATIONAL FOREST. P.O. BOX 11500 QUINCY, CA. 95971

SURVEY CREW
R.Knoettgen
D.Hobbs
L.Gross
J.Schmidt

DRAWN BY S.Sasser

SHEET: 2 OF 3