

Found 3/4" I.P. RCE 7294 N85°01'03"W, 13.66'  
Grimes 1/16 Corner per 3 RS 105


Found 3/4" I.P. RCE 7294 N83°08'10"W, 26.99'  
Grimes 1/4 Corner per 3 RS 105

Section 14

Set Section Corner in ravine per G.L.O., from found Bearing Tree stumps  
Set Bearing Tree Tags on Remains of Large Pine Stump N36°35'W, 9.8' (40" Pine N39 1/2°W, 12 lks. G.L.O.)  
Pine Stump S56°28'E, 41.5' (28" Pine S56 1/2°E, 61 lks. G.L.O.)  
10" Pine S56°16'W, 31.4'  
15" Pine N84°37'E, 34.7'

Set Bearing Tree Tags on 16" Cedar S56°40'W, 93.8'  
12" Pine N49°59'E, 105.7'

1/4 Corner Set by single proportion

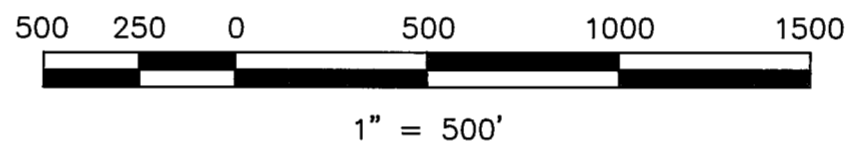

Basis of Bearings

The Basis of Bearings of this map is based upon a Solar Observation taken from a traverse point which bears N 05°40'28" W, 1956.96' from the Northwest Corner of Section 14

Found Bearing Trees with K-tags  
24" Pine blazed & scribed N 11°30' E, 13.2'  
14" Pine S 55° E, 12.5'  
13" Cedar S 70° W, 11.8'

Found B.L.M. Brass Cap stamp for 1/4 Corner Sections 13 & 24

Set Bearing Tree Tags on 5" Pine S57°22'E, 24.3'  
18" Birch S62°59'W, 25.4'  
18" Pine N51°27'W, 56.7'  
15" Birch N35°53'E, 18.2'

Set Section Corner for Sections 14, 13, 23 & 24 by double proportion

Fd. rebar and cap, L.S. 2843 per 10 P.M. 86.  
Found bearing trees  
35" Cedar, S25°W, 49.50'  
15" Pine S64°34'E, 141.5'  
18" Fir N73°07'W, 119.7'

Set Bearing Tree Tags on 14" Cedar N52°06'W, 63.1'  
24" Cedar S54°20'E, 66.5'


Set 1/4 Corner by single proportion

LEGEND

- FOUND point as described
  - SET point as described
  - SET Rebar with Aluminum Cap LS 2843
  - SET Standard U.S.F.S. Aluminum Cap stamped LS 2843 & for appropriate corner
- (R1) RECORD per 3 RS 105

SURVEYOR'S STATEMENT

This map correctly represents a survey made by me or under my direction in conformance with the requirements of the Land Surveyors' Act at the request of Gary Shaffer in JULY, 1994.

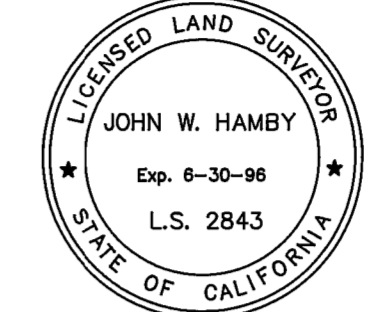

*John W. Hamby*  
John W. Hamby LS 2843

COUNTY SURVEYOR'S STATEMENT

This map has been examined in accordance with Section 8766 of the Land Surveyors' Act this 19th day of September, 1994.



*R. Tom Hunter*  
R. Tom Hunter RCE 30515  
PLUMAS COUNTY SURVEYOR  
License Expiration Date 3/31/96

RECORDER'S STATEMENT

Filed this 21st day of SEPTEMBER, 1994 at 2:35 p.m. in Book 10 of Record of Surveys, at page 26, at the request of the County Surveyor.

Fee 8.00  
File No. 7515

Judith Wells  
County Recorder  
by *Judith Wells*  
Deputy

RECORD OF SURVEY  
for  
GARY SHAFFER

A portion of Section 14  
T. 23 N., R. 13 E., M.D.M.

Plumas County ~ California  
Scale 1" = 500' JULY, 1994

Pine Stump Hole S25°01'E, 17.8' (8" Pine S24 3/4°E, 27 lks. G.L.O.)  
15" Cedar with K-tag S29°11'W, 41.2 (K-tag 62 lks.)  
Cedar Stump Hole N38°45'W, 46.0' (45" Cedar N36 1/2°W, 65 lks. G.L.O.)  
Set K-tag on 20" Cedar N8°23'W, 42.4'

Found disturbed Rock Mound and Bearing Tree stump holes, Set 5/8" rebar with Aluminum Cap LS 2843 stamped for 1/4 Corner

HAMBY SURVEYING INC.  
P.O. Box 1209  
PORTOLA, CA. 96122  
Phone 916-832-5571