


		CORNER NOTES			
<p>T24N R8E $\frac{1}{4}$ S21 S28 CORNER NO. 25 FD. USFS ALUM. MONUMENT. CORNER FALLS ON A CUT BANK ON THE NORTH SIDE OF BUCK LAKE ROAD. FD. A 13" WHITE FIR BEARS N84 3/4"W, 23.7'-VS REC. AN 11" WHITE FIR BEARS N84"W, 23.6'(8 RS 6) FD. AN 18" DOUGLAS FIR BEARS S15"W, 58.9'-VS REC. A 17" DOUGLAS FIR BEARS S14"W, 58.9'(8 RS 6)</p>	<p>T24N R8E $\frac{S2}{S1}$ $\frac{S1}{S12}$ CORNER NO. 31 FD. STD USFS MONUMENT IN A MOUND OF STONE CORNER FALLS ON A WEST SLOPE IN LIGHT TIMBER OF FIR AND PINE, 80'± EAST OF ROAD 24N25X. FD. AN 11" CEDAR BEARS N8 3/4"E, 19.1'-VS REC. A 9" CEDAR BEARS N11"E, 19.1'(7 RS 3) FD. A 17" SUGAR PINE BEARS S45"E, 9.0'-VS REC. A 15" YELLOW PINE BEARS S45"E, 9.0'(7 RS 3) FD. A 9" BLACK OAK BEARS S38 1/2"W, 17.4'-HB REC. A 7" BLACK OAK BEARS S30"W, 17.4'(7 RS 3) FD. A 7" FALLEN SNAG BEARS N46 1/4"W, 7.8'-VS REC. AN 8" SUGAR PINE BEARS N50"W, 7.5'(7 RS 3)</p>	<p>H.B. = HEALED BLAZE V.S. = VISIBLE SCRIBING S.B.T. = SCRIBED AS A BEARING TREE STD USFS MON. = 3 1/4" ALUMINUM CAP ON A 5/8" STEEL ROD</p>		<p>WC → T24N R8E R9E $\frac{S12}{S1}$ $\frac{S7}{S18}$ CORNER NO. 41 SET STD USFS MONUMENT IN A MOUND OF STONE CORNER FALLS IN SPANISH CREEK. WITNESS CORNER FALLS ON A STEEP NORTH SLOPE, 35'± SOUTH OF HIGH WATER MARK OF SPANISH CREEK AND 150'± NORTH OF BUCKS LAKE ROAD. A 12" DOUGLAS FIR BEARS N47 1/4"E, 9.5'-SBT "X BT" A 6" DOUGLAS FIR BEARS N69"W, 6.8'-SBT "X BT"</p>	<p>T25N R8E $\frac{S35}{S2}$ $\frac{S36}{S1}$ CORNER NO. 46 T24N 1970 FD. STD BLM MONUMENT IN A MOUND OF STONE. (CAP FACES WEST) FD. AN 8" BLACK OAK BEARS N56"E, 3.6'-HB REC. A 6" BLACK OAK BEARS N57"E, 4.0'(BLM 1970) FD. AN 8" CEDAR BEARS S54 1/2"E, 48.0'-VS REC. A 7" CEDAR BEARS S51"E, 47.2'(BLM 1970) FD. AN 8" CEDAR BEARS S37"W, 11.2'-VS REC. A 6" CEDAR BEARS S43"W, 11.2'(BLM 1970) FD. A 13" DOUGLAS FIR BEARS N72 3/4"W, 27.2'-HB REC. AN 8" DOUGLAS FIR BEARS N70"W, 28.4'(BLM 1970)</p>
<p>S1 SENW $\frac{1}{64}$ CORNER NO. 27 LS 3966 1993 SET STD USFS MONUMENT IN A MOUND OF STONE CORNER FALLS ON A GENTLE SOUTHEAST SLOPE, 20'± SOUTH OF THE TOP OF A SMALL FINGER RIDGE IN HEAVY REPRODUCTION FIR, PINE AND OAK. AN 8" WHITE FIR BEARS N9 1/4"W, 23.0'-SBT "X BT" AN 8" DOUGLAS FIR BEARS S41 1/2"W, 11.1'-SBT "SENW 1/64 BT"</p>	<p>RCE 26870 CORNER NO. 32 FD. A 1 1/4" ALUMINUM CAP ON A #5 REBAR. CORNER FALLS ON A STEEP EAST SLOPE, 90'± SOUTH OF A DRAW. AN 11" WHITE FIR BEARS S50 1/2"W, 15.5'-SBT "EW 1/64 S1 BT" A 9" DOUGLAS FIR BEARS N3"W, 13.0'-SBT "EW 1/64 S1 BT"</p>	<p>T24N R8E CORNER NO. 37 $\frac{1}{4}$ S11 S12 LS 3634 1984 FD. A 3 1/4" USFS ALUMINUM CAP ON A 5/8" ROD IN A MOUND OF STONE. CORNER FALLS ON A NORTHWEST SLOPE, 75'± SOUTH OF A ROAD. FD. A 10" YELLOW PINE BEARS N53"W, 8.2'-VS REC. AN 8" YELLOW PINE BEARS N55"W, 8.2'(7 RS 3) FD. A 9" DOUGLAS FIR BEARS S23"E, 22.9'-HB REC. A 7" DOUGLAS FIR BEARS S26"E, 22.6'(7 RS 3)</p>		<p>RCE 13528 CORNER NO. 42 FD. A 1 1/2" BRASS CAP ON A 1/2" BRASS ROD IN A MOUND OF STONE. CORNER FALLS ON THE TOP OF A RIDGE SLOPING SOUTHWEST. FD. AN 18" YELLOW PINE BEARS N28"W, 46.9' REC. A 19 1/2" PITCH PINE BEARS N17 1/4"W, 46.9' FD. 20" YELLOW PINE BEARS S17 1/2"W, 86.7'-VS REC. AN 18" PITCH PINE BEARS S21 1/2"W, 87.8' BOTH RECORD TREES ARE FROM USFS CORNER RECORD G-25 DATED 11-10-69</p>	<p>$\frac{1}{4}$ CORNER NO. 47 T24N R8E $\frac{S2}{S1}$ $\frac{S1}{S170}$ CORNER NO. 47 FD. STD BLM MONUMENT IN A MOUND OF STONE. CORNER FALLS ON AN EAST SLOPE IN TIMBER AND BRUSH, 15'± WEST OF THE TOP OF A RIDGE. FD. AN 8" DOUGLAS FIR BEARS N88"W, 2.7'-HB REC. A 4" DOUGLAS FIR BEARS N88"W, 3.3'(BLM 1970) FD. A 12" DOUGLAS FIR BEARS N64"E, 19.1'-HB REC. A 10" DOUGLAS FIR BEARS N64"E, 19.1'(BLM 1970)</p>
<p>S1 SWNE $\frac{1}{64}$ CORNER NO. 28 LS 3966 1993 FD. A #5 REBAR WITH A 1 1/4" ALUM. CAP MARKED RCE 26870 BEARS N85°18'08"E, 1.27'. SET STD USFS MONUMENT IN A MOUND OF STONE. CORNER FALLS ON A STEEP NORTH SLOPE, 25'± SOUTH OF A SMALL CREEK AND 40'± NORTH OF AN OLD LOGGING ROAD LANDING. A 9" CEDAR BEARS N24 1/2"W, 43.0'-SBT "SWNE 1/64 S1 BT" AN 8" DOUGLAS FIR BEARS S80"E, 11.6'-SBT "SWNE 1/64 S1 BT"</p>	<p>RCE 26870 CORNER NO. 33 FD. A 1 1/4" ALUMINUM CAP ON A #5 REBAR. CORNER FALLS ON A STEEP SOUTHEAST SLOPE, 45'± NORTH OF A SMALL DRAW AND 110'± WEST OF AN OLD LOGGING ROAD. AN 11" DOUGLAS FIR BEARS N19"E, 26.9'-SBT "1/4 S1 BT" A 15" DOUGLAS FIR BEARS S65"W, 17.7'-SBT "1/4 S12 BT"</p>	<p>LS 2702 CORNER NO. 38 FD. A 1 1/2" BRASS CAP ON A 1/2" BRASS ROD IN A MOUND OF STONE. CORNER FALLS ON TOP OF A RIDGE, 200'± WEST OF AN OLD ROAD. ALSO FD. A 1940 K-TAG. FD. A 16" SUGAR PINE BEARS S77 1/4"W, 23.4'-HB REC. A 13" SUGAR PINE BEARS S79 1/2"W, 23.4' FD. A 30" DOUGLAS FIR BEARS N50 1/2"E, 24.3'-VS REC. A 29" DOUGLAS FIR BEARS N53 1/2"E, 24.1' BOTH RECORD TREES ARE FROM USFS CORNER RECORD G-25 DATED 11-10-69</p>		<p>$\frac{1}{4}$ S1 S6 R8E R9E T24N 1970 CORNER NO. 43 FD. STD BLM MONUMENT IN A MOUND OF STONE. CORNER FALLS ON A WEST SLOPE, 500'± NORTH OF A ROAD. FD. A 9" YELLOW PINE BEARS S31 3/4"W, 35.2'-HB REC. A 5" YELLOW PINE BEARS S34"W, 35.0'(BLM 1970) FD. A 28" DOUGLAS FIR BEARS S86 3/4"E, 18.7'-VS REC. A 26" DOUGLAS FIR BEARS EAST, 18.5'(BLM 1970) FD. A 15" YELLOW PINE BEARS N13 1/4"E, 38.6'-HB REC. A 12" YELLOW PINE BEARS N16"E, 38.3'(BLM 1970)</p>	<p>T24N R8E R9E $\frac{S1}{S1}$ $\frac{S6}{S17}$ 1970 CORNER NO. 48 FD. STD BLM MONUMENT IN A MOUND OF STONE. CORNER FALLS ON A SOUTH SLOPE, 125'± NORTH OF A ROAD. FD. A 13" DOUGLAS FIR BEARS S30 1/2"W, 20.7'-HB REC. A 9" DOUGLAS FIR BEARS S34"W, 20.5'(BLM 1970) FD. A 13" SUGAR PINE BEARS N50 1/4"W, 14.4' REC. AN 8" SUGAR PINE BEARS N47"W, 14.5'(BLM 1970) FD. A 12" WHITE FIR BEARS N55 1/2"E, 18.0' REC. A 9" WHITE FIR BEARS N55 1/2"E, 18.5'(BLM 1970) FD. A 16" DOUGLAS FIR BEARS S76 1/2"E, 20.3' REC. AN 8" DOUGLAS FIR BEARS S73"E, 20.5'(BLM 1970)</p>
<p>S1 CEW $\frac{1}{64}$ CORNER NO. 29 LS 3966 1993 SET STD USFS MONUMENT IN A MOUND OF STONE. CORNER FALLS ON A GENTLE SOUTHEAST SLOPE IN REPRODUCTION FIR, OAK AND PINE. A 9" YELLOW PINE BEARS S13 3/4"W, 21.9'-SBT "CEW 1/64 S1 BT" AN 8" DOUGLAS FIR BEARS N32"W, 29.2'-SBT "CEW 1/64 S1 BT"</p>	<p>RCE 26870 CORNER NO. 34 FD. A 1 1/4" ALUMINUM CAP ON A #5 REBAR. CORNER FALLS ON A SOUTHEAST SLOPE, 200'± EAST OF THE ROAD TO SNAKE LAKE. A 17" YELLOW PINE BEARS N30 1/2"E, 24.9'-SBT "WE 1/64 S1 BT" AN 8" DOUGLAS FIR BEARS S31 3/4"E, 5.4'-SBT "WE 1/64 S12 BT"</p>	<p>T24N R8E CORNER NO. 39 $\frac{S11}{S14}$ $\frac{S12}{S13}$ 1970 FD. STD BLM MONUMENT IN A MOUND OF STONE. CORNER FALLS ON THE TOP OF A MINOR NORTH-SOUTH RIDGE, 75'± EAST OF A POWER LINE. FD. A 6" CEDAR(DEAD) BEARS N12 1/2"E, 19.1'-VS REC. A 5" CEDAR BEARS N19"E, 19.1'(BLM 1970) FD. A 7" CEDAR BEARS S21"E, 14.1'-VS REC. A 6" CEDAR BEARS S19"E, 13.9'(BLM 1970) FD. AN 8" YELLOW PINE BEARS S34 3/4"W, 33.7'-VS REC. A 7" YELLOW PINE BEARS S36"W, 33.7'(BLM 1970) FD. A 7" YELLOW PINE BEARS N84"W, 33.7'-VS REC. A 7" YELLOW PINE BEARS N62"W, 33.7'(BLM 1970) AN 8" WHITE FIR BEARS N46 1/2"E, 31.8'-SBT "T24N R8E S12 BT"</p>		<p>T25N R8E R9E $\frac{S36}{S1}$ $\frac{S31}{S6}$ T24N 1967 CORNER NO. 44 FD. STD BLM MONUMENT IN A MOUND OF STONE. CORNER FALLS IN A FLAT IN HEAVY TIMBER OF PINE AND OAK. FD. A 12" BLACK OAK BEARS N56 1/2"W, 11.3'-HB REC. AN 8" BLACK OAK BEARS N56 1/2"W, 11.3'(BLM 1967) FD. A 34" YELLOW PINE BEARS N43"E, 34.0'-HB REC. A 34" YELLOW PINE BEARS N41"E, 33.7'(BLM 1967) FD. A 7" BLACK OAK BEARS S86"E, 18.0'-HB REC. A 5" BLACK OAK BEARS S86"E, 17.8'(BLM 1967) FD. A 7" BLACK OAK BEARS S55"W, 15.1'-HB REC. A 5" BLACK OAK BEARS S55"W, 15.1'(BLM 1967)</p>	<p>T25N R8E $\frac{1}{4}$ S36 S1 CORNER NO. 45 T24N LS 3966 1993 SET STD USFS MONUMENT IN A MOUND OF STONE CORNER FALLS ON A STEEP SLOPE IN HEAVY TIMBER, 250'± EAST OF A ROAD. A 10" YELLOW PINE BEARS S49 1/2"E, 22.6'-SBT "1/4 S1 BT" A 7" WHITE FIR BEARS N29"W, 25.0'-SBT "1/4 S36 BT"</p>
<p>S1 CWE $\frac{1}{64}$ CORNER NO. 30 LS 3966 1993 SET STD USFS MONUMENT IN A MOUND OF STONE CORNER FALLS ON AN EAST SLOPE IN SPARSE TIMBER OF FIR, CEDAR AND OAK. A 9" DOUGLAS FIR BEARS N81"E, 13.8'-SBT "CWE 1/64 S1 BT" AN 8" DOUGLAS FIR BEARS S10 1/2"E, 26.2'-SBT "X BT"</p>	<p>S12 CNN $\frac{1}{64}$ CORNER NO. 35 LS 3966 1993 SET STD USFS MONUMENT IN A MOUND OF STONE CORNER FALLS ON A SOUTH SLOPE IN A SMALL DRAW. A 7" SUGAR PINE BEARS S81"W, 11.0'-SBT "NEWW 1/64 S12 BT" A 5" SUGAR PINE BEARS S5 1/2"E, 37.2'-SBT "X BT"</p>	<p>WC ↑ T24N R8E $\frac{1}{4}$ S12 S13 LS 3966 1993 CORNER NO. 40 SET STD USFS MONUMENT IN A MOUND OF STONE FOR WITNESS CORNER. TRUE CORNER BEARS N 0°25'37" W, 213.44' WITNESS CORNER FALLS ON A NORTH SLOPE, 50'± SOUTH OF BUCKS LAKE ROAD. BRIDGE TO SNAKE LAKE BEARS N30"W, 250'±. AN 8" WHITE FIR BEARS N73 1/2"E, 7.1'-SBT "X BT" AN 8" DOUGLAS FIR BEARS S9 1/4"E, 19.3'-SBT "X BT"</p>		<p>T25N R8E $\frac{1}{4}$ S36 S1 CORNER NO. 45 T24N LS 3966 1993 SET STD USFS MONUMENT IN A MOUND OF STONE CORNER FALLS ON A STEEP SLOPE IN HEAVY TIMBER, 250'± EAST OF A ROAD. A 10" YELLOW PINE BEARS S49 1/2"E, 22.6'-SBT "1/4 S1 BT" A 7" WHITE FIR BEARS N29"W, 25.0'-SBT "1/4 S36 BT"</p>	<p>S12 CNN $\frac{1}{64}$ CORNER NO. 36 LS 3966 1993 SET STD USFS MONUMENT IN A MOUND OF STONE CORNER FALLS ON A SMALL FLAT IN HEAVY TIMBER. A 10" WHITE FIR BEARS S29 3/4"W, 25.0'-SBT "CNN 1/64 S12 BT" AN 8" WHITE FIR BEARS S50"E, 8.2'-SBT "X BT"</p>

AMENDED
RECORD OF SURVEY
 FOR
USDA FOREST SERVICE
 "EASTSIDE '92"
 IN SECTIONS 1, 12, AND 21 OF T 24 N, R 8 E,
 IN SEC 31 OF T 25 N, R 8 E,
 IN SECTIONS 31, 32, 33 AND 34, T 22 N, R 12 E,
 AND IN SECTIONS 1, 2, 3 AND 4, T 21 N, R 12 E, MDM
 IN THE UNINCORPORATED AREA OF PLUMAS
 COUNTY, STATE OF CALIFORNIA

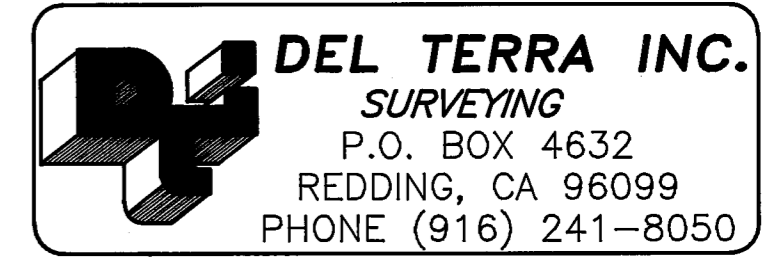

SCALE: 1" = 600' DATE: DECEMBER, 1995
 SHEET: 7 OF 9