


CORNER NOTES

- 1 RECORD: (SET 1/2" REBAR W/ALUM CAP MARKED RCE 26870 R2)
 FOUND: 1/2" REBAR W/ 1 1/2" DIA ALUM CAP MARKED RCE 26870
 SET: POURED 8" DIA X 4" DEEP CONCRETE AROUND MONUMENT
- 2 RECORD: (COMPUTED CORNER LOCATION R1)
 FOUND: NOTHING
 SET: A STANDARD MONUMENT IN 8" DIA X 8" DEEP CONCRETE 2" BELOW GROUND.
- 3 RECORD: (SET A 1/2" I.P. TAGGED LS 3297 R1)
 FOUND: (CALCULATED POINT, NOTHING SET R2)
 SET: NOTHING AT CALCULATED SET POSITION BUT A 16d NAIL BEARS WEST 0.2
- 4 RECORD: (FOUND 3/4" I.P. R1)
 FOUND: (FOUND 1/2" I.P. MARKED L.S. 3297 R2)
 SET: A 3/4" OD IP WITH METAL TAG STAMPED LS 3297 FWB A 1 1/2" OD IP, NO TAG N45°W 0.13, ORIGIN UNKNOWN, NOT ACCEPTED AS CORNER.
- 5 RECORD: (SET 1/2" IP TAGGED LS 3297 R1)
 FOUND: SFNF. FROM SET CORNER POSITION A 5/8" OD ROUND BAR, NO TAG, BEARS N18°E 2.43 FEET, NO RECORD
 SET: SPLIT CEDAR FENCE POST W/TAG ON TOP, STAMPED "JOHN C. SIMPSON RCE 11173, N85°43'50"E 30.07 FT, NO RECORD OF ORIGIN, SEE R4.
- 6 RECORD: (SET 1/2" REBAR TAGGED LS 3297 R1)
 FOUND: (FOUND A 1/2" I.P. MARKED L.S. 3297 R2)
 SET: A 7/8" OD IP, NO TAG, 6" BELOW GRADE ACCEPTED AS SAME MONUMENT PER R2.
- 7 RECORD: (SET A 1/2" REBAR W/ALUMINUM CAP MARKED RCE26870 R2)
 FOUND: SFNF
 SET: A STANDARD MONUMENT
- 8 RECORD: (SET A 1/2" IP TAGGED LS3297 R1)
 FOUND: 1 1/8" OD IP, NO TAG, ACCEPTED AS PER R1.
 SET: WIRED LS 7794 TAG TO FOUND IP.
- 9 RECORD: (FOUND 1/2" REBAR W/PLASTIC CAP RCE11173 R1)
 FOUND: 1/2" REBAR WITH AN UNREADABLE PLASTIC CAP PUSHED DOWN ON REBAR 2", N75°49'03"W 0.31 OF RECORD POSITION PER R1, NO RECORD OF ORIGIN.
 SET: NOTHING
- 10 RECORD: (FOUND A 3/4" I.P. LS 2587 R1)
 FOUND: 1" O.D. I.P., WITH 1 3/8" OD IP COUPLING THREADED ON TOP, NO TAG, S87°33'42"W 0.16 OF RECORD POSITION PER R1, NO RECORD OF ORIGIN.
 SET: NOTHING
- 11 RECORD: (SET 1/2" IP TAGGED LS 3297 R1)
 FOUND: (FOUND 3/4" IP - NO TAG R8)
 SET: 7/8" OD IP, NO TAG, 1" BELOW GRADE, ACCEPTED AS IP PER R1
- 12 RECORD: (CENTER 1/4 CORNER OF SECTION 19 IS A 1/2" IRON PIN NO TAG, PER 3 PM 109. PLACED BRASS TAG STAMPED R.C.E. 13225, R3)
 FOUND: (CENTER OF SECTION 19 RECORD LOCATION FROM 3 RS 144 & 4 M 29 R1)
 SET: 3/4" OD ROUND BAR WITH TAG WIRED TO IT RCE 13225 ACCEPTED AS CENTER 1/4, SECTION 19 PER R3. SEE EXPLANATION ON SHEET 2, FWB: MONUMENT 13 AS DESCRIBED BELOW S72°13'41"E 12.12 FEET.
- 13 RECORD: (CTR 1/4 SEC. 19, SET 3/4" IRON PIPE & TAG L.S. 6051 R4)
 FOUND: 1 1/8" OD IP, NO TAG. ACCEPTED AS CENTER 1/4 IP PER R4.
 SET: NOTHING
- 14 RECORD: (SET A USDA MONUMENT PER R5)
 FOUND: USDA MONUMENT FOR E 1/4 SECTION 19
 SET: NOTHING

CURVE TABLE

CURVE	Δ	RADIUS	LENGTH	TANGENT	CHORD BEARING	CHORD LENGTH
A	79°58'47"	25.00	34.90	20.97	S49°32'12"E	32.13
B	70°32'44"	10.00	12.31	7.07	S25°44'03"W	11.55
C	70°31'47"	50.00	61.55	35.36	S25°43'05"W	57.74
D	34°54'55"	50.00	30.47	15.72	S27°00'16"E	30.00
E	78°40'01"	50.00	68.65	40.97	S83°47'43"E	63.38
F	100°01'13"	25.00	43.64	29.81	S40°27'49"W	38.31
G	66°25'33"	50.00	57.97	32.74	S23°39'50"W	54.78

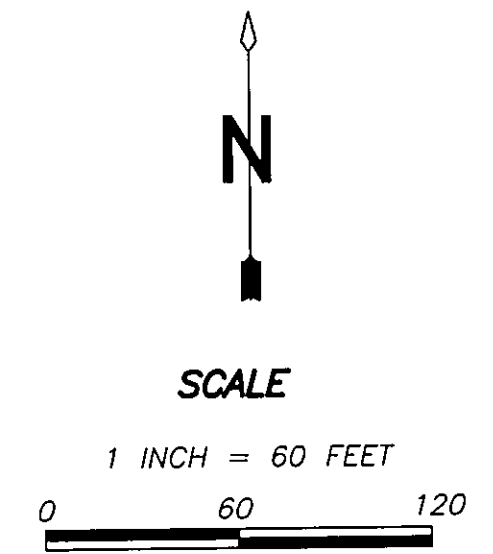

BASIS OF BEARING

THE BASIS OF BEARING FOR THIS SURVEY IS THE CALCULATED INVERSE OF CORNERS 1 - 4 BEING N87°53'51"W AS CALCULATED FROM THOSE CORNERS SHOWN ON R2.


GENERAL NOTES

A STANDARD MONUMENT IS A 1/2" REBAR WITH A 1 1/2" DIA ALUMINUM CAP STAMPED "RICHARD KNOETTGEN LS 7794"
 AN LS 7794 TAG IS A 1 1/2" DIA STAINLESS STEEL TAG STAMPED "RICHARD KNOETTGEN LS 7794".
 ALL INFORMATION IN PARENTHESES IS RECORD.

LEGEND

- FOUND MONUMENT
- SET MONUMENT
- CALCULATED POINT
- DIA DIAMETER
- ALUM ALUMINUM
- FWB FROM WHICH BEARS
- OD OUTSIDE DIAMETER
- IP IRON PIPE
- SFNF SEARCHED FOR NOT FOUND
- (R1 4 M 94,95 HENDERSON 1976)
- (R2 4 M 145,146 BRANDT 1980)
- (R3 6 M 110-113 FITES 1990)
- (R4 8 RS 132,133 TIBBEDEAUX 1990)
- (R5 7 RS 50 FILSINGER 1985)
- (R6 7 M 131-134 TIBBEDEAUX 1994)
- (R8 11 PM 46,47 BROWN 1998)
- (C/R1 CALCULATED FROM R1)
- (A) SEE CURVE TABLE

USDA MONUMENT IS A 2 1/2" OD ALUM PIPE STAMPED WITH THE UNITED STATES DEPARTMENT OF AGRICULTURE LOGO AND STAMPED ACCORDING TO THE MANUAL OF SURVEYING INSTRUCTIONS, 1973.

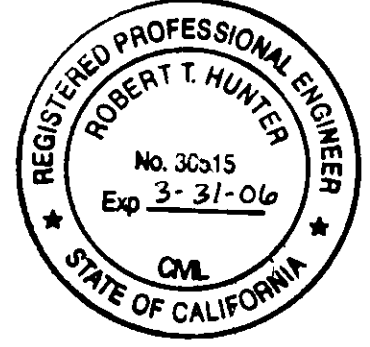

SURVEYOR'S STATEMENT

This map correctly represents a survey made by me or under my direction in conformance with the requirements of the Professional Land Surveyors' Act at the request of William C. Martin Jr. & Wayne J. Miller
 in June 2004
 Richard Knoettgen
 Richard Knoettgen L.S. 7794
 License Exp. Date 12/31/05

COUNTY SURVEYOR'S STATEMENT

This map has been examined in accordance with Section 8766 of the Professional Land Surveyors' Act this 26th day of October, 2004.
 R. Tom Hunter
 R. Tom Hunter, R.C.E. 30515
 Plumas County Surveyor
 License Exp. Date 03/31/06

COUNTY RECORDER'S STATEMENT

Filed this 26th day of October, 2004 at 2:05 pm.
 in Book 13 of Records of Surveys, at page 75-76,
 at the request of the County Surveyor. Kathleen Williams
 County Recorder
 Fee: 10.00
 Document No: 2004-11613
 By: Kelly Wilkinan
 Deputy

RECORD OF SURVEY

FOR
 WILLIAM C. MARTIN JR. AND SUSAN M. CHRISTENSEN, LOT 7
 AND
 WAYNE J. MILLER AND RUTH J. MILLER, PARCEL C
 SECTION 19 T24N R10E MOUNT DIABLO MERIDIAN
 PLUMAS COUNTY, CALIFORNIA
 KNOETTGEN LAND SURVEYING
 1830 CHANDLER ROAD PO BOX 312
 QUINCY, CA 95971
 (530) 283-4418
 DATE OF SURVEY JUNE 2004
 SHEET: 1 OF 2